


Executive Order G-70-187
Exhibit 2
Figure 5G

6275
(SYSTEM MONITOR VENT SENSOR)

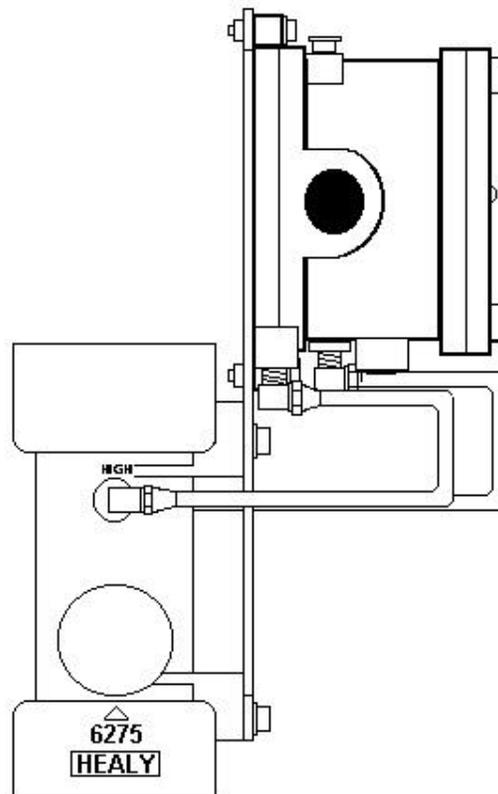

6275 System Monitor Vent Sensor. The 6275 Vent Sensor is mounted on top of the manifolded vent pipes below the +1.5" W.C. Pressure Vent Valve (P/N #HPV1.5) (see Exhibit 2 Figures 5E and 5F). Two wires (16 or 18 AWG) from the SMCB exit the building through a sealed conduit (per NEC). These wires must be 600 volt rated, Class 1 type insulation. They connect to the switch terminals common (COM.) and normally open (NO) inside the 6275 Vent Sensor Switch which is an integral part of the Vent Sensor Assembly. See Healy Systems wiring diagram 9200-6308 (REV 4) sheets 1 and 2 for general layout and installation requirements.