


Executive Order G-70-186
Exhibit 2
Figure 3

VP500 CENTRAL VACUUM VANE PUMP
(TYPICAL SUMP INSTALLATION)

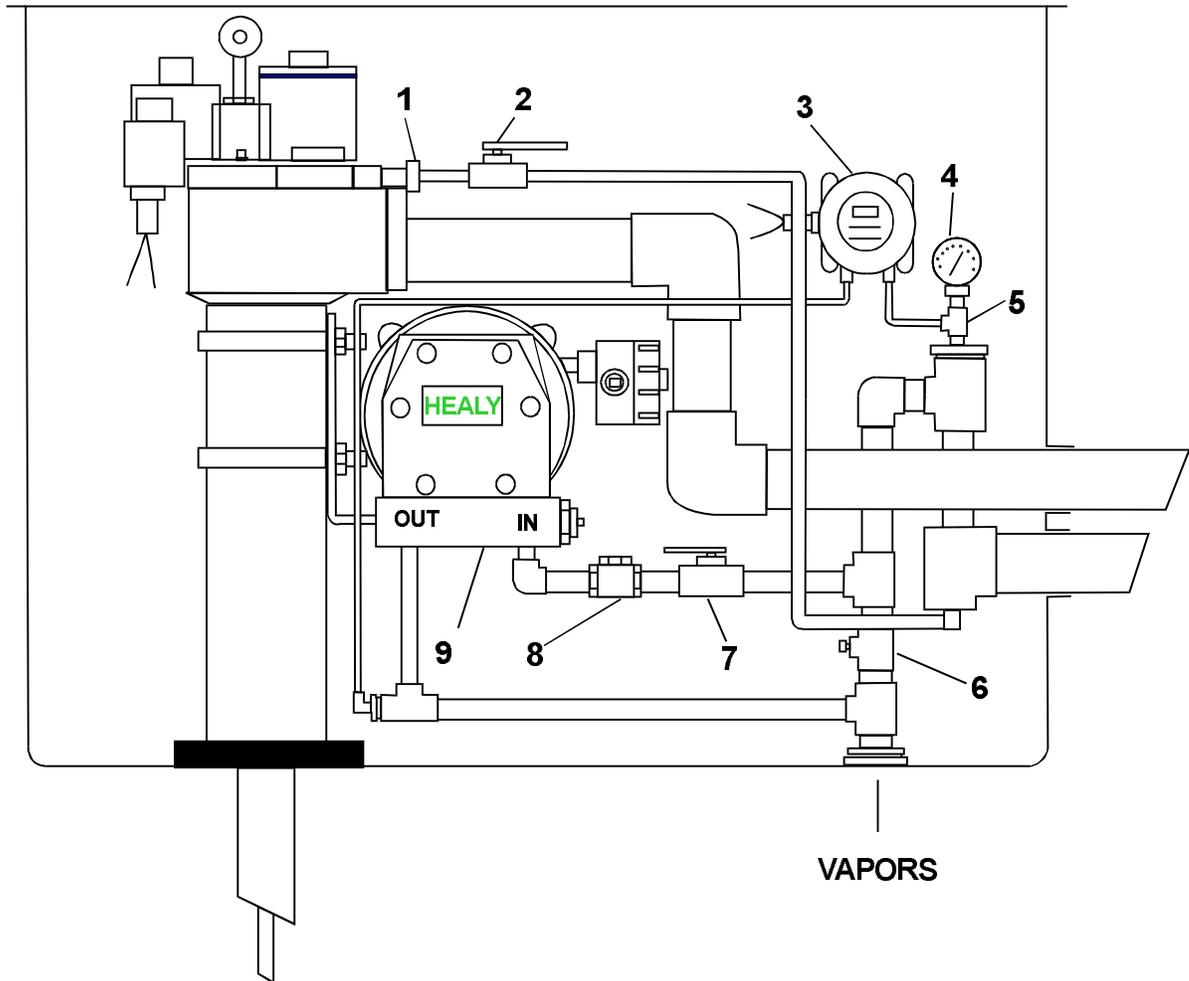

Below is a list of required items in a typical VP500 Vane Pump sump installation.

1. Syphon Valve, Red Jacket
2. 1/4" Ball Valve, UL listed
3. Pressure Switch #93928, Healy Systems
4. W.C. Vacuum Gage, 0" to 100" (FOR TESTING ONLY)
5. 1/4" TEE for vacuum gage test port
6. 1" Ball Valve, UL listed (USUALLY CLOSED, OPEN FOR TESTING ONLY)
7. 1" Ball Valve, UL listed
8. Condensate Drain Check Valve #9466, Healy Systems
9. VP500 Central Vacuum Vane Pump, Healy Systems