

Biodiesel and Renewable Diesel Rulemaking Workshop

Lex Mitchell

January 20, 2010

Overview

- Background
- Biodiesel Performance
- Emissions Results
- Regulatory Concept
- Next Steps
- Contacts
- Questions & Discussion

Background

- Driving Forces:
 - Global Warming Solutions Act of 2006
 - Low Carbon Fuel Standard (2009)
 - Increasing demand for biofuels

Background


- 2008 CA Diesel Consumption
 - 4.2 billion gallons (ARB 2009)
- 2020 CA Projected Demand
 - 5.91-6.60 billion gallons (CEC 2007)
- 2008 US biodiesel production
 - 700 million gallons produced (NBB 2008)
 - 2.6 billion gallons capacity (NBB 2008)

Background

- What is biodiesel?
 - Straight Vegetable Oil (SVO) vs Fatty Acid Methyl Esters (FAME)
 - Feed stocks
- What is renewable diesel?
 - Hydrotreating
 - Feed stocks

Background

- Reaction of a triglyceride with methanol to make biodiesel

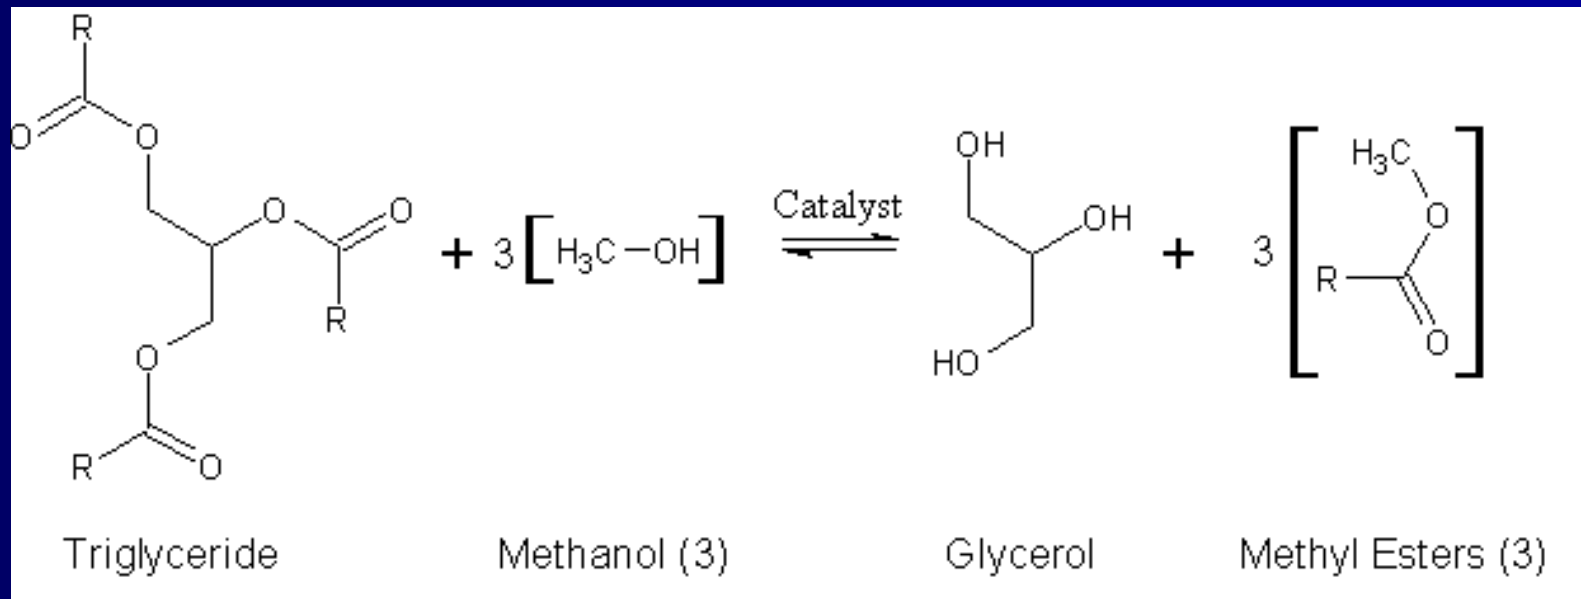

Background

- Biodiesel and renewable diesel blends:
 - Blends are labeled B% or R% to signify the amount of biodiesel or renewable diesel blended into petroleum diesel
 - Example:
 - B5 is a blend of 5 percent biodiesel and 95 percent petroleum diesel
 - R20 is a blend of 20 percent renewable diesel and 80 percent petroleum diesel

Biodiesel Performance

- Fleet Survey Coordinated by ARB:
 - 40 Agencies
 - Vehicle Types
 - School Buses, Transit Buses, Ambulances, Road Maintenance Trucks, Shipping Trucks, Construction Vehicles, Boats, and Off-road Equipment
 - 80 to 220,000 gallons per week
 - Earliest fleet used since 1995

Biodiesel Performance

- Fleet Survey Results:
 - B20 was most common blend
 - Some fleets switched to B5 in the winter
 - 20 of 40 reported no fuel filter plugging
 - 18 of 40 experienced fuel filter plugging before tanks cleaned and filters changed
 - One injector erosion and increase in elastomer seal failures with B100

Biodiesel Performance

- Biodiesel performance:
 - Stakeholder feedback and data are requested on in-use performance of biodiesel including:
 - Glycerin impurities
 - Cloud point
 - Stability
 - Engine impacts

Emissions Results

- Presentation by Bob Okamoto, SAPS

Regulatory Concept

- Guiding Principles:
 - Simplicity
 - Ease of compliance
 - Preserve emissions performance of CARB diesel

Regulatory Concept

- Primary focus:
 - Mitigate NOx impact of biodiesel
 - NOx mitigation strategies vary depending on blend level
 - Equivalent emissions certification instead of mitigating measures
 - Renewable diesel is considered NOx mitigated if it meets ASTM specifications

Regulatory Concept

- Add the following section to the alternative fuels regulations:
 - 13 CCR 2292.8 Specifications for Biodiesel and Renewable diesel fuels
 - B5 or less
 - B6 to B20
 - R1 to R100

Regulatory Concept

- **Applicability**

- All biodiesel and renewable diesel sold in California will have to comply with these specifications

Regulatory Concept

- NOx mitigation measures for all biodiesel blends:
 - Biodiesel blendstock must meet ASTM D6751 08
 - These requirements apply even if certification is the mitigation method

Regulatory Concept

- NOx mitigation measures for blends B5 or less:
 - Blend must conform to ASTM D975 08ae1
 - Blend with up to 2500 ppm Ditetertiarybutylperoxide (DTBP); or
 - Blend with renewable diesel in a ratio of at least 3 parts renewable to 1 part biodiesel; or
 - Emissions equivalent certification

Regulatory Concept

- NOx mitigation measures for blends B6 to B20:
 - Blend must conform to ASTM D7567 08
 - Blend with renewable diesel in a ratio of at least 4 parts renewable to 1 part biodiesel; or
 - Emissions equivalent certification

Regulatory Concept

- Biodiesel Blends above B20:
 - There is no ASTM specification for biodiesel fuel blends above B20
 - ARB found no NOx mitigating strategies for biodiesel blends above B20

Regulatory Concept

- Equivalent emissions certification:
 - The fuel producer may subject their fuel to the procedures in 13 CCR §2282(g) to demonstrate NOx emissions equivalence to CARB diesel
 - Staff is currently looking into development of a predictive model

Regulatory Concept

- Renewable diesel blends:
 - Renewable diesel blendstocks must meet both ASTM D975 08ae1 and 13 CCR §2280-2283 to be considered NOx mitigated;

Next Steps

- Comments requested by Feb 4, 2010
- Draft Regulatory Language
- Discuss at Next Public Workshop (Late February to Early March– Tentative)

Contacts

Lex Mitchell

Air Pollution Specialist
(916) 327-1513
amitchel@arb.ca.gov

Robert Okamoto

Staff Air Pollution Specialist
(916) 327-2953
rokamoto@arb.ca.gov

Floyd Vergara

Manager, Industrial Section
(916) 327-5986
fvergara@arb.ca.gov

<http://www.arb.ca.gov/fuels/diesel/altdiesel/biodiesel.htm>

Questions & Discussion