



# Life-Cycle Assessment of SWACO Landfill Gas to Delivered LNG and L/CNG in California

March 20, 2014; Updated December 2, 2014

Submitted to:

BP Natural Gas and Power

Prepared by

ICF International  
75 E. Santa Clara St., Suite 300  
San Jose, CA 95113

POC: Jeffrey Rosenfeld; [Jeffrey.rosenfeld@icfi.com](mailto:Jeffrey.rosenfeld@icfi.com)

## Table of Contents

General Information .....	3
Process Description .....	3
Data Collection and Process Results .....	4
LFG Production Plant .....	4
Transportation to California by Pipeline .....	7
Liquefaction .....	7
LNG Transport to Refueling Station .....	8
LNG Storage .....	9
L/CNG Conversion .....	10
SWACO Fuel Pathway Results .....	10
Appendix A: Summary of CA-GREET Inputs .....	11

## General Information

(This Section contains Confidential Business Information)

LES Renewable NG, LLC, is constructing a landfill gas (LFG) refinery located in Grove City, OH. The refinery will recover methane from the Solid Waste Authority of Central Ohio (SWACO) Franklin County landfill, which is operated by Waste Management of Ohio. The refinery was expected to be completed in February 2014.

The refinery will use a membrane separation system and pressure swing absorption to remove the impurities in the landfill gas and produce commercially saleable natural gas. LES will purchase natural gas from Columbia Gas of Ohio to provide pilot fuel for the thermal oxidizer. LES will purchase electricity from AEP (American Electric Power) to serve the plant's electrical demand.

The LES refinery is designed to intake up to [REDACTED] of landfill gas and produce [REDACTED] of product gas at [REDACTED]. The Btu content at 98.5% methane averages 895 Btu (LHV)/SCF<sup>1</sup>. The Final Permit to Install and Operate issued by the Ohio Environmental Protection Agency (OEPA) March 2013 limits the amount of gas that can be processed to [REDACTED] of landfill gas, which is more than the designed capacity. Based on this permit limit, the US EPA permit inlet capacity is [REDACTED] at the lower heating value. The equivalent maximum volume of renewable fuels produced is [REDACTED].

The following pathway was produced using the designed material balance and electric profile provided by LES and contained in the EPA RFS2 engineering review and two (2) years (2011 – 2012) of liquefaction data.

## Process Description

(This Section contains Confidential Business Information)

[REDACTED]

[REDACTED]

[REDACTED]

---

<sup>1</sup> Methane Lower Heat Value = 909.4 Btu/scf (Source: ASTM D3588 "Standard Practice for Calculating Heat Value, Compressibility Factor, and Relative Density of Gaseous Fuels")

[REDACTED]

## Data Collection and Process Results

To estimate GHG emissions, the energy and materials necessary for the following processes needs to be determined: LFG Production Plant, Transport of Gas to California (Pipeline), and Liquefaction.

### LFG Production Plant

(This Section contains Confidential Business Information)

The refinery is designed for a maximum throughput of [REDACTED]; the daily capacity is [REDACTED] of gas production at 98.5% methane. The permitted maximum throughput is [REDACTED]. Based on this permitted limit, the US EPA Permit Capacity is [REDACTED] of methane production, which is equivalent to [REDACTED]. LES will purchase grid electricity to run electric motors that drive the purification processes. The refinery will use an onsite thermal oxidizer and flares to combust gas not meeting pipeline specifications or unable to be accepted in the pipeline. LES does not have process heaters. The refinery will use pipeline natural gas to fuel the thermal oxidizer.

The process has a thermal oxidizer that consumes the waste stream LFG [REDACTED] which is [REDACTED] of the input LFG [REDACTED]. The SWACO Plant expected load is [REDACTED] as shown in the submitted electric profile ([REDACTED]). The electric profile shows the maximum demand values when the equipment is expected to be used 100% of the time and factors for motor efficiency, power factor, percent (%) of time running, brake Hp, and percent (%) design oversize are multiplied to the full load to determine the expected actual loads. The electric motors operate at [REDACTED]). This means that operationally, the power draw of the system will be approximately [REDACTED]. The electric motors consume [REDACTED] for processing.

There are no process heaters, therefore there is no process fuels combusted, only waste streams and natural gas as feed and pilot for the thermal oxidizer. The thermal oxidizer operates 100% of the time. The submitted material balances for the TOX show a flow of [REDACTED] with [REDACTED] methane equal to [REDACTED]. The TOX has a natural gas pilot of [REDACTED]). This is shown in the submitted material balance (*OH-LES-SWACO Eng Rev Attachments.pdf*) which is also part of the EPA RFS2 engineering report.

The table below shows the provided data converted to GREET model inputs. The SWACO pathway utilizes the CA-GREET default values for LFG recovery. After the table is a simplified process diagram of the facility. The value of [REDACTED] in Table

1 below is the amount of designed pipeline quality biogas produced. All supporting data and calculations for Table 1 and Figure 1 below can be found in [REDACTED] spreadsheet on the "Summary" tab. This spreadsheet includes the data and values shown within the EPA RFS2 engineering review appendices on the "PFD Values" tab. To determine combustion emissions from the consumed natural gas and landfill gas at the landfill gas plant, the GREET default values for natural gas combustion process during natural gas liquefaction (100% natural gas turbine) were chosen since they represent the processes more closely to TOX than natural gas compression (100% natural gas internal combustion engine).

Table 1. SWACO LFG Plant Operating Energy and Flare Credit

(This Table contains Confidential Business Information)

	Hourly Average Modeled Data	Btu/MMBtu of Product Gas	Input Value	Changed Cells – NG Tab
LFG Produced	[REDACTED] MMBtu	1,000,000		
Imported Electricity	[REDACTED] kWh	[REDACTED] Btu	[REDACTED] %	A179 (via C184)
LFG Consumed (TOX)	[REDACTED] MMBtu	[REDACTED] Btu	[REDACTED] %	A175 (via C183)
Imported Natural Gas	[REDACTED] MMBtu	[REDACTED] Btu	[REDACTED]	A176 (via C185)
Processing Efficiency	-	[REDACTED]	[REDACTED] %	A166 (via C182)
Flare Credit	-	[REDACTED] Btu	Calculated w/in GREET	

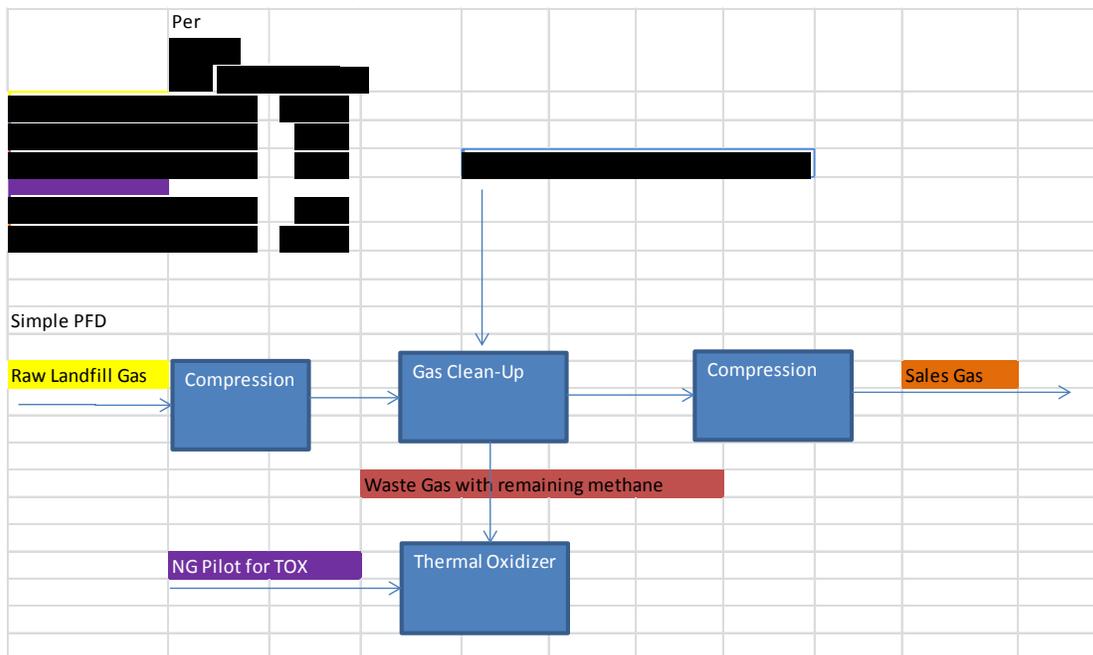


Figure 1. SWACO Process per MMBtu and MMBtu/day Energy Flows

The GREET model LFG pathway was then modified to adjust efficiency gas and process energy shares as listed in Table 1. The Southeast Asia region on the Regional LT tab was changed to the RFCW Region to represent the eGRID (8<sup>th</sup> Edition<sup>2</sup>) where Grove City is located and this was used for SWACO. The ARB methodology of converting eGRID electricity mix to marginal mix was employed. This changed the electric mix cells of J83-J88 on the Regional LT tab to those shown in Table 2. The remaining values from the Southeast Asia Region (now the RFCW Region) were changed to match the US Average.

Table 2. RFCW Electricity Grid Mix

	eGRID Grid Mix	Marginal Grid Mix	CA-GREET Cell Regional LT Tab
Residual oil	0.8%	0.8%	J83
Natural gas	3.5%	27.9%	J84
Coal	69.9%	69.9%	J85
Nuclear	23.6%	0%	J86
Biomass	0.5%	0.5%	J87
Other (renewables)	1.8% (w/ hydro)	0.9% (w/o hydro)	J88

This produced the results for LFG to biomethane shown in the table below taken from cells on the NG Tab. Conversion from g/MMBtu to g/MJ was done using the conversion factor of 1,055.055 MJ/MMBTU as is done in the CA-GREET model.

The recovery energy and emissions are based on ARB LFG pathway defaults of [REDACTED] of electricity/MMBtu of landfill gas.<sup>3</sup>

Table 3. SWACO LFG Plant Greenhouse Gas Emissions

(This Table contains Confidential Business Information)

	Recovery Emissions	SWACO LFG Processing	CA-GREET Cell NG Tab
gVOC/MMBTU	[REDACTED]	[REDACTED]	B163/C163
gCO/MMBTU	[REDACTED]	[REDACTED]	B164/C164
gCH4/MMBTU	[REDACTED]	[REDACTED]	B165/C165
gN2O/MMBTU	[REDACTED]	[REDACTED]	B166/C166
gCO2/MMBTU	[REDACTED]	[REDACTED]	B167/C167
gCO2e/MMBTU	[REDACTED]	[REDACTED]	B168/C168
gCO2e/MJ	[REDACTED]	[REDACTED]	B169/C169
gCO2e/MJ Flare Credit		[REDACTED]	D169
Total gCO2e/MJ Recovery + Processing		[REDACTED]	E169

<sup>2</sup> eGrid 8<sup>th</sup> Edition Version 1.0, Year 2009 Summary Tables, created May 2012.  
[www.epa.gov/cleanenergy/documents/egridzips/eGRID\\_8th\\_edition\\_V1-0\\_year\\_2009\\_Summary\\_Tables.pdf](http://www.epa.gov/cleanenergy/documents/egridzips/eGRID_8th_edition_V1-0_year_2009_Summary_Tables.pdf)  
<sup>3</sup> [http://www.arb.ca.gov/fuels/lcfs/022709lcfs\\_lfg.pdf](http://www.arb.ca.gov/fuels/lcfs/022709lcfs_lfg.pdf) page 9.

## Transportation to California by Pipeline

The pipeline transport distance was modified to 2,171 miles from Grove City, OH to Boron, CA where the gas will be liquefied. The distance was determined by the using the driving route most similar to the pipeline map. Google Maps was used to determine the driving routes with the I-40 route most similar to the pipeline map. The emissions were determined by linked cell E148 on the NG tab to cell F479 on the T&D\_Flowcharts tab for LFG to CNG. The table below shows the pipeline transport emissions from cells F163-F169 on the NG Tab.

Table 4. SWACO LFG Transport Greenhouse Gas Emissions

(This Table contains Confidential Business Information)

Transport Emissions	SWACO LFG Transport
gVOC/MMBTU	██████████
gCO/MMBTU	██████████
gCH4/MMBTU	██████████
gN2O/MMBTU	██████████
gCO2/MMBTU	██████████
gCO2e/MMBTU	██████████
gCO2e/MJ	██████████

## Liquefaction

(This Section contains Confidential Business Information)

Based on the submitted Confidential Business Information from Clean Energy Fuels for two (2) years (2011-2012), the Boron facility requires ██████████ kWh/gal of LNG for liquefaction (██████████) found in ██████████. The data and efficiency in the excel file have been previously approved in Pathway LNG014. Only electricity is required for the process making the fuel shares ██████████% electricity. For the Boron LNG facility, the feed gas is the same as the product LNG gas. ██████████ Btu is the energy content of one gallon of LNG. All excess gas that is not converted to LNG is sent to the neighboring natural gas power plant. Table 5 below shows the calculation from kWh per gallon to process efficiency and the cells that were changed. Table 6 shows the results from cells G163- G169.

Table 5. Boron LNG Plant Operating Energy

(This Table contains Confidential Business Information)

All Units in Btus per Gal of LNG	Boron LNG Plant	Input Value	Changed Cells – NG Tab
Feed Gas	[REDACTED]		
Liquefaction Electricity	[REDACTED] Btu	[REDACTED] %	AD79
Liquefaction Natural Gas	[REDACTED]	[REDACTED] %	AD75
Liquefaction Efficiency	[REDACTED] %	[REDACTED] %	AD66

Table 6. Boron LNG Plant Greenhouse Gas Emissions

(This Table contains Confidential Business Information)

Recovery and Processing Emissions	Boron LNG Plant
gVOC/MMBTU	[REDACTED]
gCO/MMBTU	[REDACTED]
gCH4/MMBTU	[REDACTED]
gN2O/MMBTU	[REDACTED]
gCO2/MMBTU	[REDACTED]
gCO2e/MMBTU	[REDACTED]
gCO2e/MJ	[REDACTED]

### LNG Transport to Refueling Station

In addition the CA-GREET default LNG transport distance of 50 miles was used but the fuel shares were modified to utilize the Westport HPDI trucks consuming 90% LNG and 10% diesel with an EER of 1.0. The numbers were inputted in cells CD95 (% diesel consumption) and CD97 (% LNG consumption) on the “T&D” tab and the results were taken from cells H163-H169 on the “NG” tab.

Table 7. LNG Transport Greenhouse Gas Emissions

(This Table contains Confidential Business Information)

	California LNG Plant – 50 miles 10% Diesel and 90% LNG	
gVOC/MMBTU		█
gCO/MMBTU		█
gCH4/MMBTU		█
gN2O/MMBTU		█
gCO2/MMBTU		█
gCO2e/MMBTU		█
gCO2e/MJ		█

### LNG Storage

In addition the CA-GREET default for LNG storage was used. The default values are listed in Table 8 below and yield the results in Table 9 (the results were taken from cells I163-I169 on the “NG” tab.).

Table 8. LNG Storage CA-GREET Default Values

	Bulk Terminal Storage	CA-GREET Cells Inputs Tab	Distribution	CA-GREET Cells Inputs Tab
Boil-Off Rate: % per Day	0.05	E171	0.1	F171
Duration of Storage or Transit: Days	5	E174	0.1	F174
Recovery Rate for Boil-Off Gas	80%	E179	80%	F179

Table 9. LNG Storage Greenhouse Gas Emissions

	LNG Storage
gVOC/MMBTU	-
gCO/MMBTU	-
gCH4/MMBTU	11.10
gN2O/MMBTU	-
gCO2/MMBTU	-
gCO2e/MMBTU	277
gCO2e/MJ	0.26

## L/CNG Conversion

To convert from LNG to CNG, LNG is re-vaporized and then compressed to cylinder pressure (at about 3000psi). According to ARB default LNG and CNG pathways (as sent to Clean Energy and ICF by ARB Staff):

- Re-gasified to LNG: + 0.75 gCO<sub>2</sub>e/MJ<sup>4</sup>
- Compressed to CNG: +2.14 gCO<sub>2</sub>e/MJ<sup>5</sup>
- Total: 2.89 gCO<sub>2</sub>e/MJ

## SWACO Fuel Pathway Results

When the CA-GREET model is run completely with the modifications listed above, the table below shows the complete pathway results. The WTT pathway gCO<sub>2</sub>e/MJ results were taken from cell J170 which is the sum of cells E170 – I170 on the “NG” tab for LNG. The TTW gCO<sub>2</sub>e/MJ was taken from the Detailed California-Modified GREET Pathway for Liquefied Natural Gas (LNG) from Landfill Gas<sup>6</sup>.

Table 10 - Pathway Results

GHG Emissions (gCO <sub>2</sub> e/MJ)	SWACO LFG Plant to LNG	SWACO LFG Plant to L/CNG
Landfill Gas Recovery	■	■
Landfill Gas Processing	■	■
Flare Credit	■	■
Landfill Gas Transport	■	■
Liquefaction	■	■
LNG Transport	■	■
LNG Storage	■	■
L/CNG Conversion		■
gCO <sub>2</sub> e/MJ WTT	■	■
Carbon in Fuel	■	■
Vehicle CH <sub>4</sub> and N <sub>2</sub> O	■	■
gCO <sub>2</sub> e/MJ TTW	■	■
gCO <sub>2</sub> e/MJ WTW	33.19	35.31

<sup>4</sup> [http://www.arb.ca.gov/fuels/lcfs/092309lcfs\\_lng.pdf](http://www.arb.ca.gov/fuels/lcfs/092309lcfs_lng.pdf)

<sup>5</sup> [http://www.arb.ca.gov/fuels/lcfs/022709lcfs\\_cng.pdf](http://www.arb.ca.gov/fuels/lcfs/022709lcfs_cng.pdf)

<sup>6</sup> [http://www.arb.ca.gov/fuels/lcfs/092309lcfs\\_lfg\\_lng.pdf](http://www.arb.ca.gov/fuels/lcfs/092309lcfs_lfg_lng.pdf)

## Appendix A: Summary of CA-GREET Inputs

Parameter	Unit	Value	CA-GREET Cell Changed
LFG Recovery and Transport			
Thermal	Btu/MMBtu	█	CA-GREET Default (L85)
Electricity	Btu/MMBtu	█	CA-GREET Default <sup>7</sup> (L91)
Total Energy	Btu/MMBtu	█	N/A
LFG Plant			
			NG Tab
LFG Processing Efficiency	%	█	AI66 (via C182)
Electricity Fuel Share	%	█	AI79 (via C184)
LFG Fuel Share	%	█	AI75 (via C183)
Natural Gas Fuel Share	%	█	AI76 (via C185)
Electricity	kWh/MMBtu	█	N/A
Electricity	Btu/MMBtu	█	Calculated in CA-GREET (AI91)
Natural Gas	Btu/MMBtu	█	Calculated in CA-GREET (AI85)
LFG	Btu/MMBtu	█	Calculated in CA-GREET (AI87)
Credit for Not Flaring	Btu/MMBtu	█	Calculated in CA-GREET (AJ88)
Total Energy	Btu/MMBtu	█	N/A
Electricity Grid Mix			
			Regional LT Tab
Residual oil	%	0.8	J83
Natural gas	%	27.9	J84
Coal	%	69.9	J85
Nuclear	%	0	J86
Biomass	%	0.5	J87
Other (renewables)	%	0.9	J88
Natural Gas Transport			
			T&D Flowcharts Tab (via NG Tab)
Pipeline Distance	mi	2,171	F479 (via E148)
Liquefaction			
			NG Tab
Electricity	kWh/Gallon	█	N/A
Liquefaction Efficiency	%	█	AD66
Electricity Fuel Share	%	█	AD79
Natural Gas Fuel Share	%	█	AD75
Electricity	Btu/MMBtu	█	Calculated in CA-GREET (AD91)

<sup>7</sup> [http://www.arb.ca.gov/fuels/lcfs/022709lcfs\\_lfg.pdf](http://www.arb.ca.gov/fuels/lcfs/022709lcfs_lfg.pdf), pages 9-10.

LNG Transport			T&D Tab
Truck LNG Fuel Share	%	90	CD97
Truck Diesel Fuel Share	%	10	CD95
LNG Storage			Inputs Tab
Boil-Off Rate: % per Day	%/day	0.05 / 0.1	E171 / F171
Duration of Storage or Transit: Days	Days	5 / 0.1	E174 / F174
Recovery Rate for Boil-Off Gas	%	80% / 80%	E179 / F179
L/CNG			NG Tab
L/CNG Conversion	gCO2e/MJ	2.89	J171