

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapters 1 and 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-02-003;

IT IS ORDERED AND RESOLVED: That the following equipment produced by the manufacturer is certified as described below. Production equipment shall be in all material respects the same as those for which certification is granted.

| ENGINE DESCRIPTION | | | |
|--|--|-------------------------------|---|
| MANUFACTURER | ENGINE FAMILY (E.O. NUMBER) | ENGINE SIZE (cc) | FUEL TYPE (CNG/LNG=compressed/liquefied natural gas LPG=liquefied petroleum gas) |
| Chongqing Rato Power Manufacturing Corporation | ECRPS.4382GA (U-U-169-0108) ECRPS.3012GA (U-U-169-0107) | 389, 420, 438 301 | Gasoline |
| S.A. = See Attachment TBC = To Be Certified | | | |
| EQUIPMENT DESCRIPTION | | | |
| MODEL YEAR | EVAPORATIVE FAMILY | FUEL TANK SIZE (liters) | EQUIPMENT APPLICATION |
| 2014 | CM4202 | 5.0, 6.0, 6.5, 25, 27 | Compressor, Pump, Generator Set, Pressure Washer, Tiller |
| EMISSION CONTROL SYSTEMS (ECS) | | ENGINE and/or EQUIPMENT MODEL | |
| CM | | See Attachment | |
| A. ECS TYPE (Venting Control Type/Tank Barrier Type): 1. Venting Control Type and Code:- Canister=C Sealed Tank=S Other=O 2. Tank Barrier Type and Code:- Metal=M Treated HDPE or PE=P Co-extruded=C Selar=L Nylon=N Acetal=A Other=O B. EVAPORATIVE FAMILY 2-Letter CODE (Venting Control Codes =C, S, O); (Tank Barrier Codes = M, P, C, L, N, A, O). Note: Always list venting control type or code first before tank barrier type or code. Do not use abbreviations for ECS types. | | | |

The following are the evaporative emission standards (Title 13, California Code of Regulations, 13 CCR Section 2754(a) or 2754(b), as applicable), and certification levels in grams per day (g/day) or grams per square meter per day (g/m²/day) or grams per liter (g/l) for this evaporative family or the component Executive Order, as applicable. The running loss emissions control has been demonstrated by the manufacturer.


| *not applicable | | DESIGN BASED | | | |
|---|---|---|---|---|---|
| FUEL HOSE PERMEATION (grams ROG/m ² /day) | | FUEL TANK PERMEATION (grams ROG/m ² /day) | | CARBON CANISTER BUTANE WORKING CAPACITY (grams HC/liter) | |
| STANDARD | CERTIFICATION LEVEL OR EXECUTIVE ORDER | STANDARD | CERTIFICATION LEVEL OR EXECUTIVE ORDER | STANDARD | CERTIFICATION LEVEL OR EXECUTIVE ORDER |
| 15 | Q-08-005, Q-08-017, Q-10-003, Q-12-003 | 1.5 | * | 1.4 | C-U-06-008, C-U-07-021, C-U-06-031, Q-08-035, Q-09-003, Q-11-002, Q-07-006, C-U-07-016, C-U-07-022, Q-08-036, Q-09-004, Q-11-023 |

BE IT FURTHER RESOLVED: That for the listed equipment, the manufacturer has submitted, and the Executive Officer hereby approves, the information and materials to demonstrate certification compliance with 13 CCR Section 2759 (labeling) and 13 CCR Sections 2760 and 2764 (emission control system warranty).

Equipment certified under this Executive Order must conform to all applicable California emission regulations.

This Executive Order is only granted to the engine family and model-year listed above. Equipment in this family that is produced for any other model-year is not covered by this Executive Order.

Executed at El Monte, California on this 21st day of November 2013.


 Erik White, Chief
 Mobile Source Operations Division


Attachment, 1 of 2

DRAFT

Small Off-Road Evaporative Certification Database Form (Supplementary Information)

MODEL SUMMARY

| S1. Worst Case (Check One) | S2. Engine or Equipment Model | S3. Sales Codes (check all appropriate) | | | S4. Engine Class (I or II) | S5. Fuel System (FI or CARB) | S6. Fuel Tank Vol. (Liters) | S7. Fuel Tank Internal Surface Area (m ²) | S8. Fuel Line Type | S9. Nominal Fuel Line Length (mm) | S10. Fuel Line Inside Diameter (mm) | S11. Exhaust Family | S12. Fuel Tank Executive Order | S13. Fuel Line Executive Order | S14. Carbon Canister or Other Venting Control Executive Order |
|-------------------------------|--|--|----------|----------|-------------------------------|---------------------------------|--------------------------------|--|-----------------------|--------------------------------------|--|------------------------------|-----------------------------------|--|--|
| | | CA Only | 49-State | 50-State | | | | | | | | | | | |
| | R390III R420III, K420III R440 R300 RT100ZB26-5. 2Q RT50YB100-7. 2Q RTAXQ1-190-6 | | | X | II | CARB | 6.0 or 5.0 or 6.5 | 0.24 or 0.19 or 0.23 | Multi-layer | 210 or 195 or 240 | 4.0 or 5.0 or 6.0 | ECRPS.4382GA ECRPS.3012GA | N/A | Q-08-005 or Q-08-017 or Q-10-003 or Q-12-003 | C-U-07-021 or C-U-06-008 or C-U-06-031 or Q-08-035 or Q-09-003 or Q-11-002 or Q-07-006 |

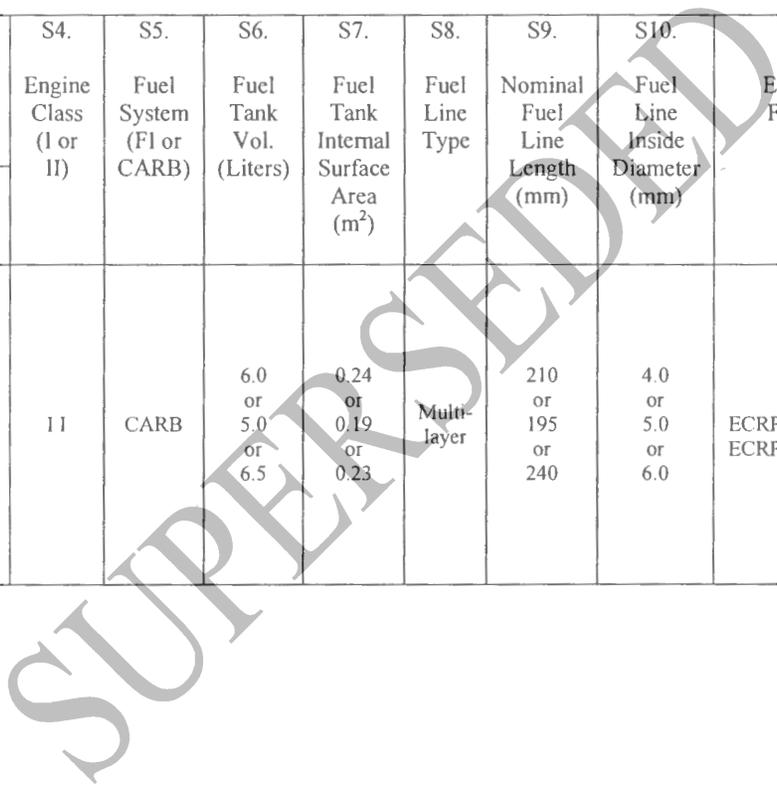

Attachment, 2 of 2

DRAFT

| | | | | | | | | | | | | | | |
|--|--|--|---|----|------|----|------|-------------|--|-------------------------------|------------------------------|-----|--|--|
| | R5000P, R5000DP, R5000P-H, R5000DP-H;R6000P,R6000P- S,R6000P-3,R6000P-8, R6000P-E,R6000DP, R6000DP-3,R6000DP-E, R6000DP-T,R6000DP-8, R6000PN-W;R6000P-G, R6000DP-G; R6000P-E1, R6000DP-E1,R6000P-9, R6000DP-9, R6000P-M, R6000P-E, R7100DP-M, R7100P,R7100DP,R7100DP-2, R7100DP-3,R7100P-8, R7100DP-8,R7100DP-9, R7100DP-E,R7100DP-E1, R7100DP-E2, R7100DP-T, R7100P-G,R7100DP-G, R7100DPN-E; | | | | | 25 | 0.75 | | | | | | | C-U-07-022 or C-U-07-016 or Q-08-036 or Q-09-004 or Q-11-023 |
| | R6000P-E, R7100DP-M, R7100P,R7100DP,R7100DP-2, R7100DP-3,R7100P-8, R7100DP-8,R7100DP-9, R7100DP-E,R7100DP-E1, R7100DP-E2, R7100DP-T, R7100P-G,R7100DP-G, R7100DPN-E; R8000P,R8000DP,R8000P-H, R8000DP-H, R8000DP-2, R8000P-3,R8000DP-3, R8000P-8,R8000DP-8, R8000DP-9, R8000DP-E, R8000DP-E1,R8000DP-T, R8000P-G,R8000DP-G, R8000DPN-E; PMC105001,PMC105005, PMC105007,PMC105007.010, PMC105001.01,PM0105007.01, PM0105007.02,PM0105001.02, PM0105005.01,PMC105005.01, PC0105007; 56551, 56680, 56682; GP5500; PMC106500,PMC106505, PMC106507,PMC106507.01, PC0106507,PM0106507.01, PM0106507.02,PM0106505.01, PM0106500.02; 56875, 56877; GP7500E,GP6500E PMC105007.01 PMC106507.01 | | X | II | CARB | 27 | 0.76 | Multi-layer | 210 or 195 or 230 or 240 | 4.0 or 4.5 or 6.0 | ECRPS.4382GA ECRPS.3012GA | N/A | Q-08-005 or Q-08-017 or Q-10-003 or Q-12-003 | C-U-07-022 or Q-08-036 or Q-11-023 |

