

Pursuant to the authority vested in the Air Resources Board by the Health and Safety Code, Division 26, Part 5, Chapters 1 and 2; and

Pursuant to the authority vested in the undersigned by Health and Safety Code Sections 39515 and 39516 and Executive Order G-14-012;

IT IS ORDERED AND RESOLVED: That the following engine and emission control systems produced by the manufacturer are certified for use in small off-road equipment. Production engines shall be in all material respects the same as those for which certification is granted.

MODEL YEAR	ENGINE FAMILY	DISPLACEMENT (cc)	ENGINE CLASS	FUEL TYPE (CNG/LNG=compressed/liquefied natural gas LPG=liquefied petroleum gas)
2015	FKHXS.7252GB	725, 747	4-stroke, ≥ 225 cc	Gasoline
DURABILITY HOURS	SPECIAL FEATURES & EMISSION CONTROL SYSTEMS		TYPICAL EQUIPMENT APPLICATION	
500	EM		Walk-Behind Lawnmower, Riding Mower, Tractor and Other Industrial Equipment	
ENGINE CODES/MODELS (rated power in kilowatt, kW)	See Attachment			
<small>ABBREVIATIONS: EM=engine modification TWC/OC=three-way/oxidizing catalyst WUTWC/WUOC=warm-up TWC/OC O2S=oxygen sensor HO2S=heated O2S EGR=exhaust gas recirculation AIR=secondary air injection PAIR=pulsed AIR MFI=multi port fuel injection SFI=sequential MFI TBI=throttle body fuel injection DFI=direct fuel injection TC/SC=turbo/super charger CAC=charge air cooler 2(prefix)=parallel 2(suffix)=in series ECM=engine control module</small>				

The following are the hydrocarbon plus oxides of nitrogen (HC+NOx), carbon monoxide (CO), and particulate matter (PM) emission standards (Title 13, California Code of Regulations, (13 CCR) Section 2403(b)), and certification emission levels for this engine family in grams per kilowatt-hour (g/kW-hr). Engines within this engine family shall have closed crankcases in conformance with Section 1054.115(a) of the "California Exhaust Emission Standards and Test Procedures for New 2013 and Later Small Off-Road Engines," adopted October 25, 2012.

*=not applicable	HC+NOx (g/kW-hr)	CO (g/kW-hr)	PM (g/kW-hr)
STANDARD	8.0	549	*
FAMILY EMISSION LEVEL	6.6	549	*
CERTIFICATION LEVEL	6.3	324	*

BE IT FURTHER RESOLVED: That the family emission level(s) (FELs), as applicable, is an emission limit declared by the manufacturer for use in the averaging, banking and trading program and in lieu of an emission standard for certification. It serves as the applicable emission standard for determining compliance of any engine within this engine family under 13 CCR Sections 2403(e)(1) and 2407(a).


BE IT FURTHER RESOLVED: That for the listed engines, the manufacturer has submitted, and the Executive Officer hereby approves, the information and materials to demonstrate certification compliance with 13 CCR Section 2404 (emission control labels) and 13 CCR Sections 2405 and 2406 (emission control system warranty).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

Quarterly reports of engines produced in this engine family for sale in California shall be submitted to the Executive Officer no later than 45 days after the end of each calendar quarter.

This Executive Order is only granted to the engine family and model-year listed above. Engines in this family that are produced for any other model-year are not covered by this Executive Order.

Executed at El Monte, California on this 9 day of September 2014.

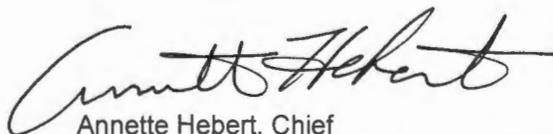

Annette Hebert, Chief
 Emissions Compliance, Automotive Regulations and Science Division

Model Year: 2015
 Manufacturer: Kohler Co.
 Engine Family: FKHXS.7252GB

Issued:
 Revised: 8/11/2015
 E.O. Number:

Page: 9
 RC2 10/30/15
 U-U-005-0458

Small Off-Road Engine Model Summary Form

ATTACHMENT B 1 of 1

Units for Table: kW

Worst Case?	47. Model Designation	48. Sales Code	49. Displ (cc)	50. Bore/Stroke	51. Ignition Timing	52. Max Power	53. Rated Speed (RPM)	54. Rated Torque	55. Torque Speed (RPM)	56. Emiss Control Sys
	KT715	50-State	725	83 x 67 mm	16°	15.1	3600	53.0 N-m	2200	EM
	KT725	50-State	725	83 x 67 mm	16°	15.9	3600	54.2 N-m	2200	EM
	KT730	50-State	725	83 x 67 mm	16°	16.8	3600	54.8 N-m	2400	EM
	KT735	50-State	725	83 x 67 mm	16°	17.6	3600	55.3 N-m	2400	EM
	KT740	50-State	725	83 x 67 mm	12-23°	18.4	3600	55.0 N-m	2200	EM
X	KT745	50-State	747	83 x 69 mm	12-23°	19.0	3600	55.5 N-m	2600	EM
	ZT710	50-State	725	83 x 67 mm	16°	15.0	3600	53.0 N-m	2200	EM
	ZT720	50-State	725	83 x 67 mm	16°	15.6	3600	53.3 N-m	2200	EM
	ZT730	50-State	747	83 x 69 mm	16°	16.8	3600	55.0 N-m	2400	EM
	ZT740	50-State	747	83 x 69 mm	12-23°	18.2	3600	55.0 N-m	2400	EM
	KT610	50-State	660	83 x 61 mm	16°	13.6	3600	48.0 N-m	2000	EM
	KT620	50-State	660	83 x 61 mm	16°	14.8	3600	48.7 N-m	2000	EM