

Plug-in HEV Vehicle Design Options and Expectations


ZEV Technology Symposium

*California Air Resources Board
Sacramento, CA*

September 27, 2006

Tony Markel

National Renewable Energy Laboratory

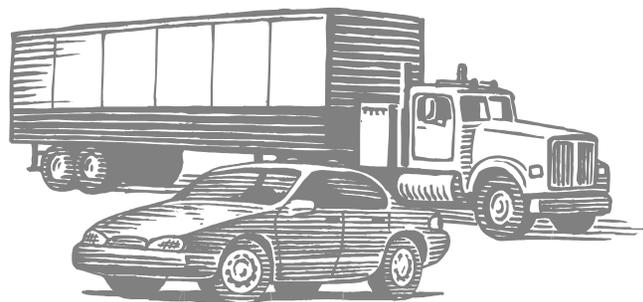

With support from
FreedomCAR and Vehicle Technologies Program
Office of Energy Efficiency and Renewable Energy
U.S. Department of Energy

Disclaimer and Government License


This work has been authored by Midwest Research Institute (MRI) under Contract No. DE-AC36-99GO10337 with the U.S. Department of Energy (the “DOE”). The United States Government (the “Government”) retains and the publisher, by accepting the work for publication, acknowledges that the Government retains a non-exclusive, paid-up, irrevocable, worldwide license to publish or reproduce the published form of this work, or allow others to do so, for Government purposes.

Neither MRI, the DOE, the Government, nor any other agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe any privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise does not constitute or imply its endorsement, recommendation, or favoring by the Government or any agency thereof. The views and opinions of the authors and/or presenters expressed herein do not necessarily state or reflect those of MRI, the DOE, the Government, or any agency thereof.


Key Messages

- There are many ways to design a PHEV ...
 - the best design depends on your objective
- PHEVs provide potential for petroleum displacement through fuel flexibility
 - what are the cost and emissions tradeoffs
- PHEV design space has many dimensions
 - simulation being used for detailed exploration
- Simulations using real-world travel data provides early glimpse into in-use operation

PHEV Stakeholder Objectives

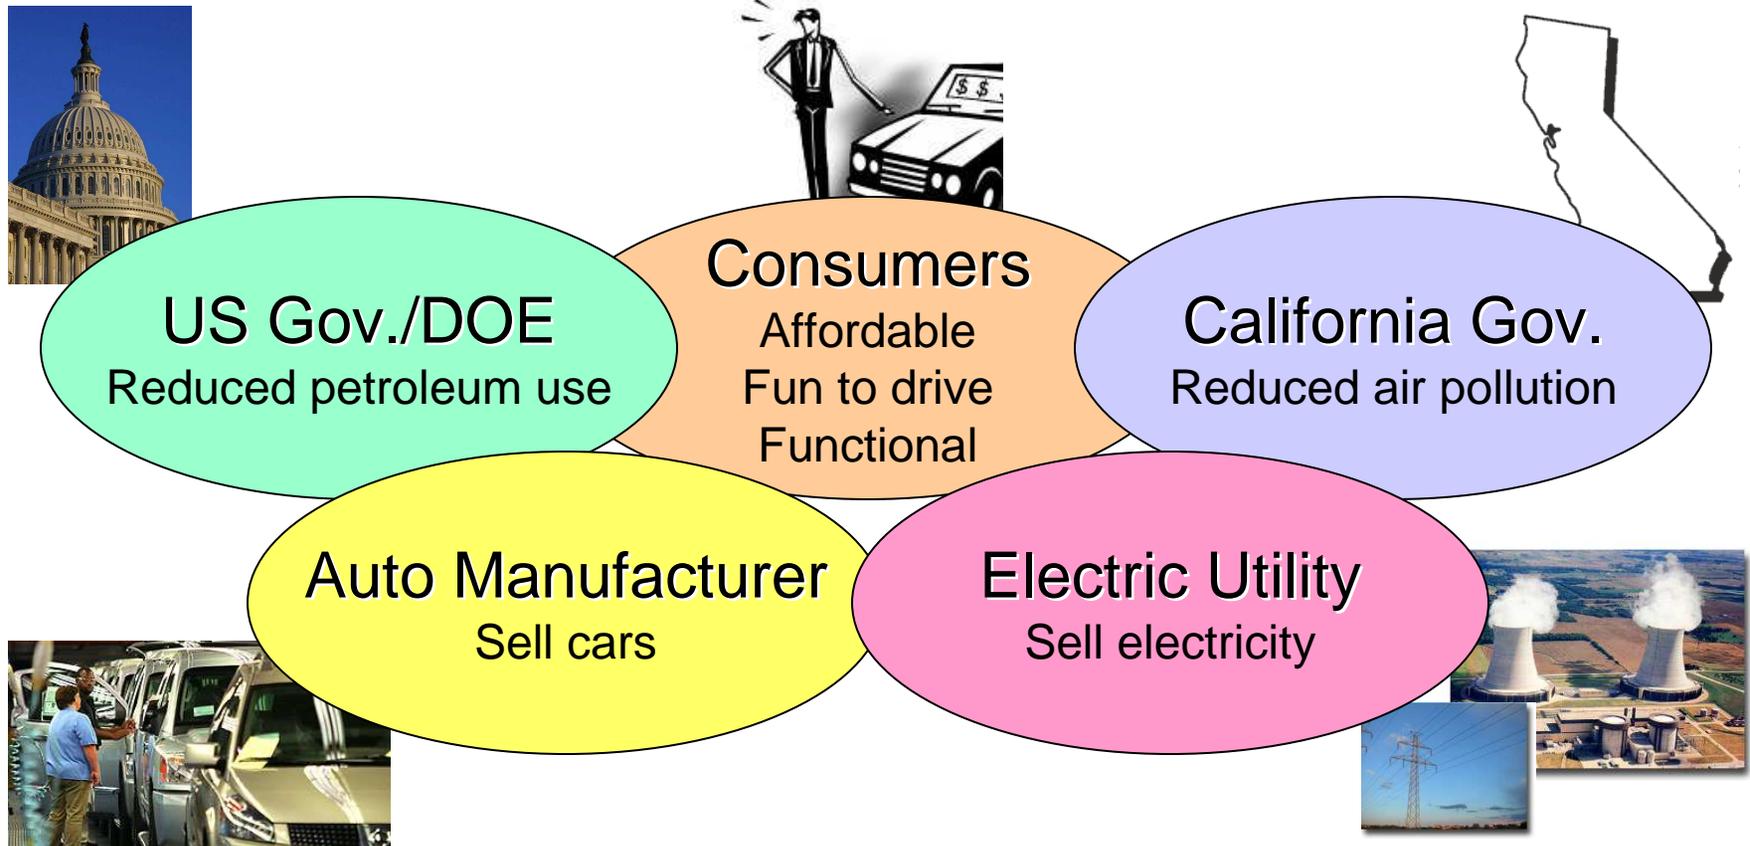

A Plug-In Hybrid-Electric Vehicle (PHEV)

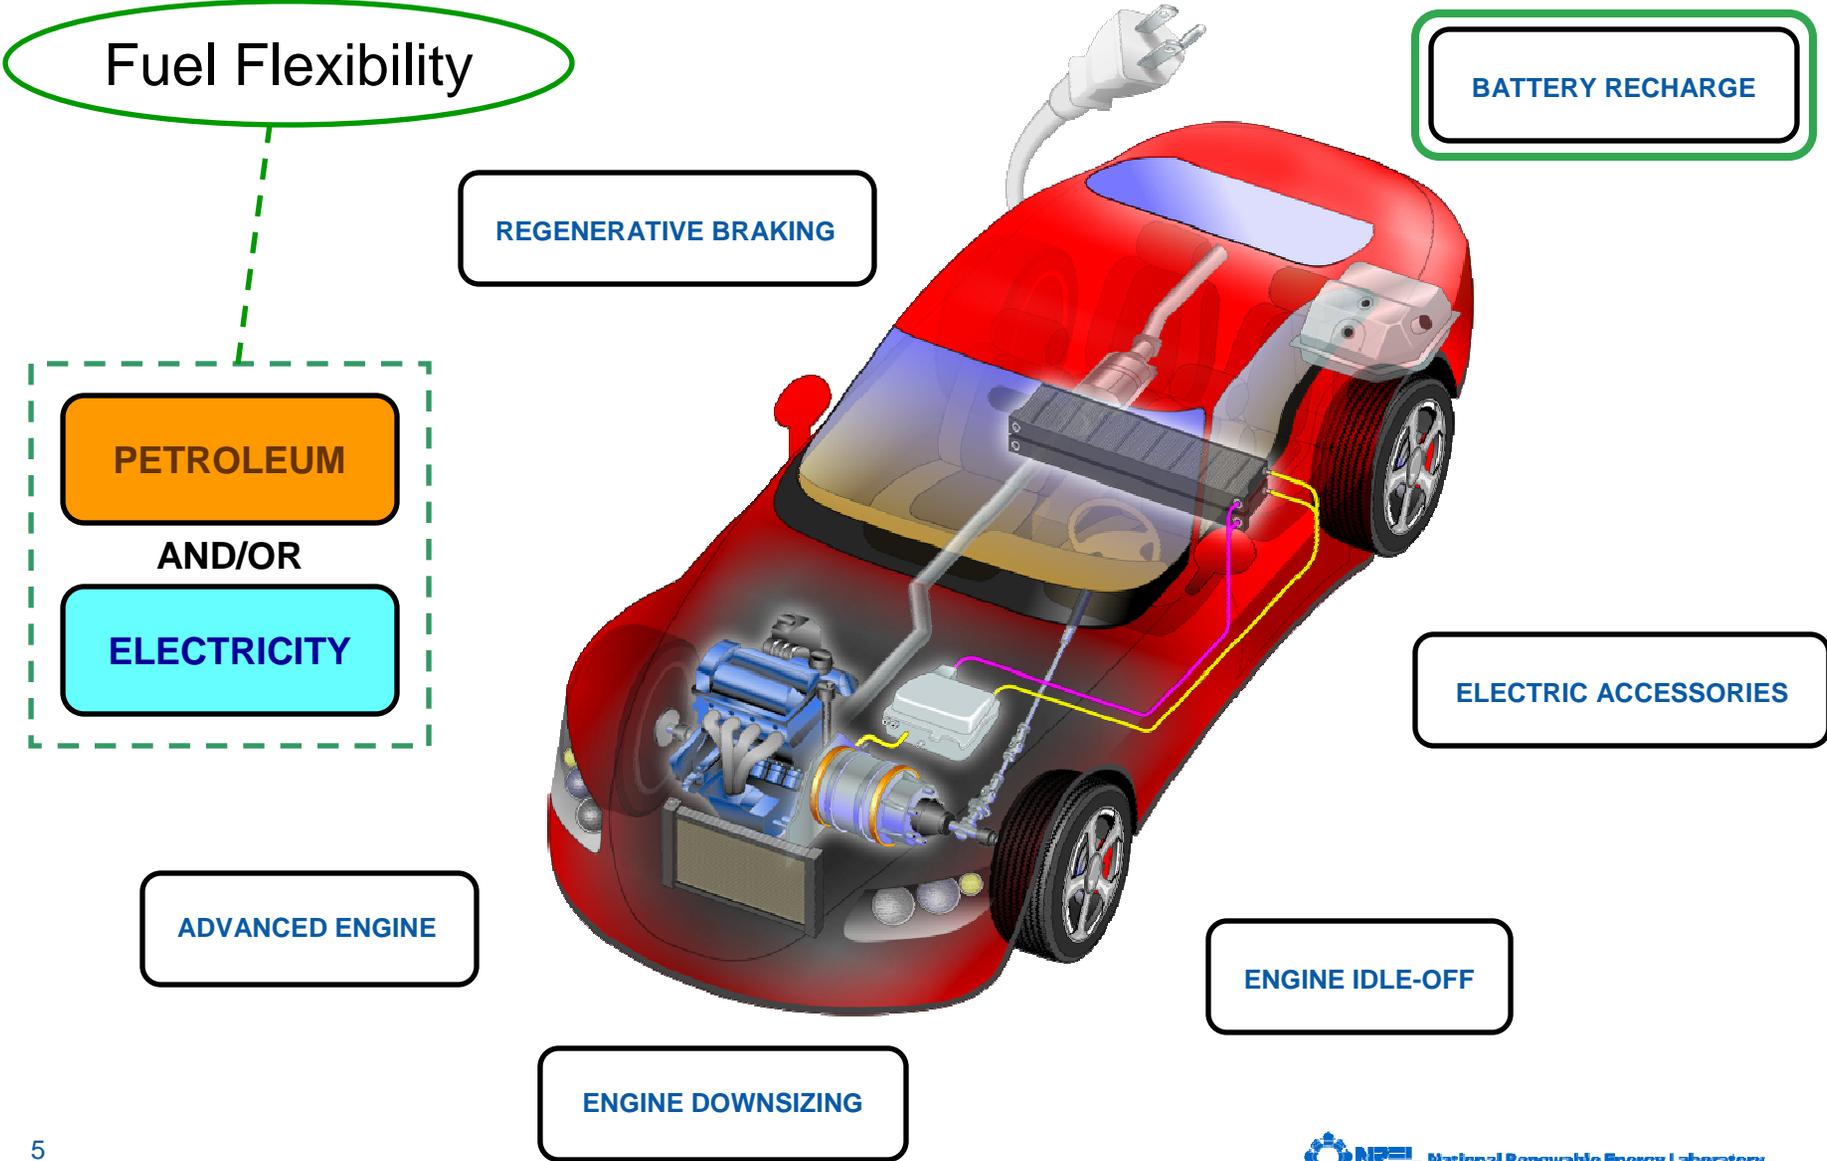

Some PHEV Definitions

Charge-Depleting (CD) Mode: An operating mode in which the energy storage SOC may fluctuate but on-average decreases while driving

Charge-Sustaining (CS) Mode: An operating mode in which the energy storage SOC may fluctuate but on-average is maintained at a certain level while driving

All-Electric Range (AER): After a full recharge, the total miles driven electrically (engine-off) before the engine turns on for the first time.

Electric Vehicle Miles (EVM): After a full recharge, the cumulative miles driven electrically (engine-off) before the vehicle reaches charge-sustaining mode.

Charge-Depleting Range (CDR): After a full recharge, the total miles driven before the vehicle reaches charge-sustaining mode.


Blended Strategy: A charge-depleting operating strategy in which the engine is used to supplement battery/motor power.

PHEV20: A PHEV with useable energy storage equivalent to 20 miles of driving energy on a reference driving cycle. A PHEV20 can displace petroleum energy equivalent to 20 miles of driving on the reference cycle with off-board electricity.

NOTE: PHEV20 does not imply that the vehicle will achieve 20 miles of AER, EVM or CDR on the reference cycle nor any other driving cycle. Operating characteristics also depend on the power ratings of components, the powertrain control strategy and the nature of the driving cycle

Battery Definition as Key Input to Simulation

Input parameters that define the battery in BLUE

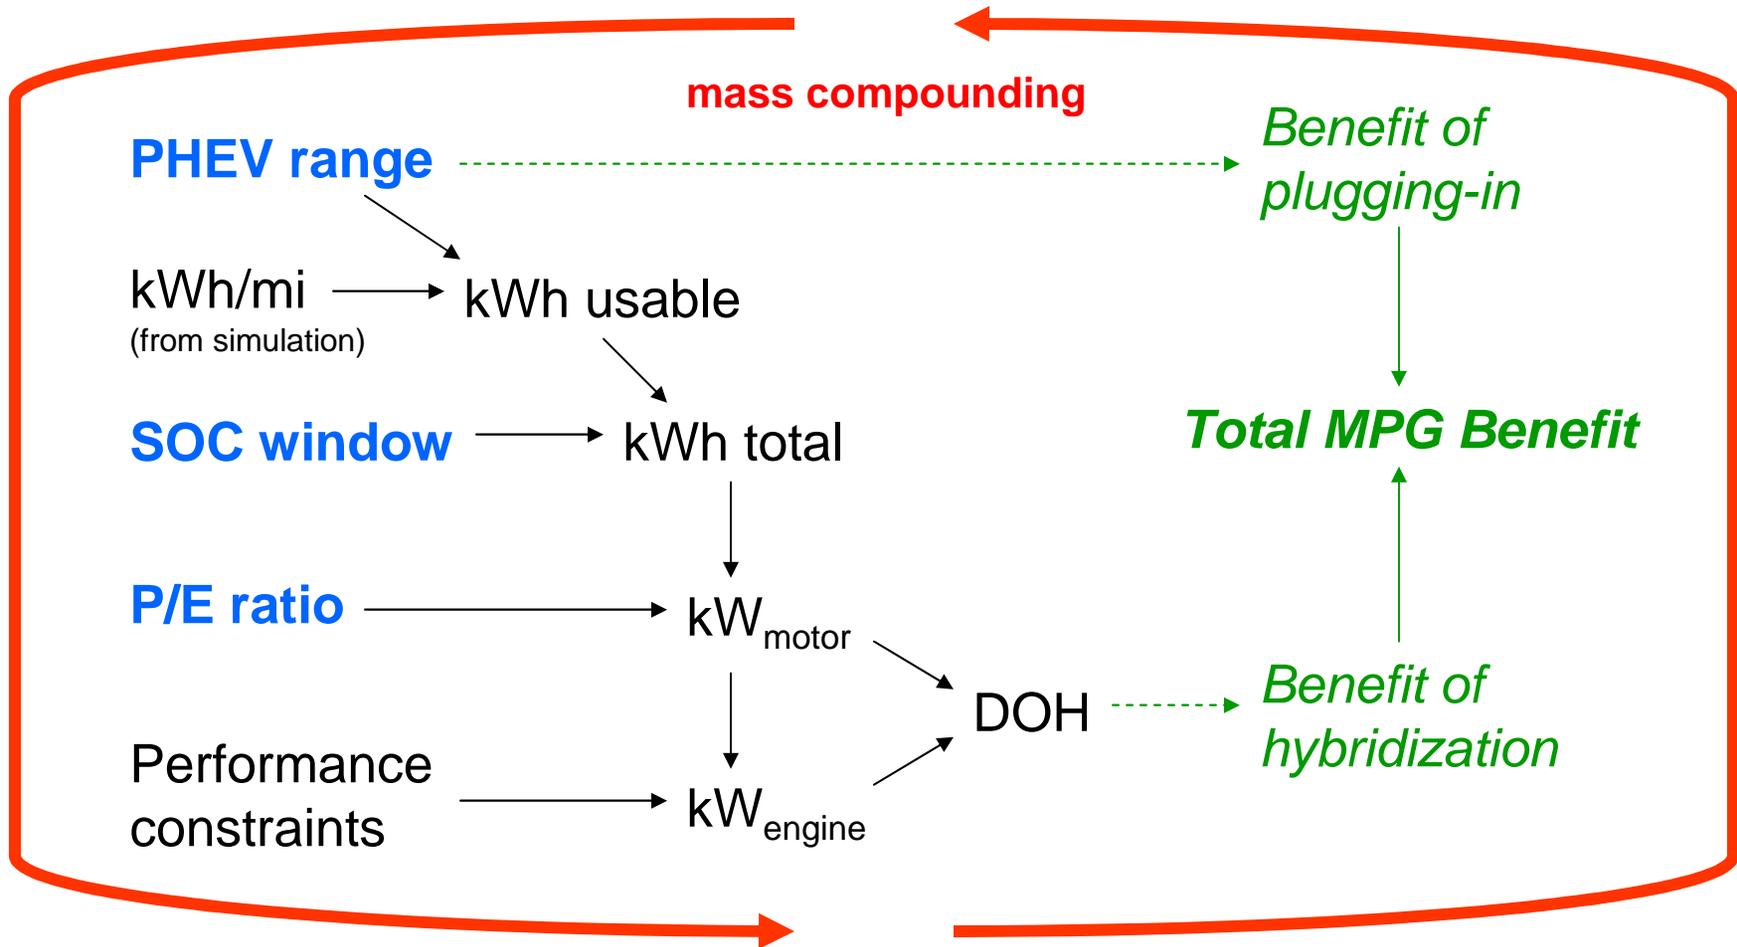

DOH = degree of hybridization

Batteries in Current PHEVs



Varta

NiMH



Electro Energy Inc.



Johnson Controls/SAFT

**Co/Ni based
Li-Ion**



Kokam



Valence Technology



**Iron phosphate
based Li-Ion**



A123 Systems


Battery SOC Design Window

In setting requirements, we must have realistic expectations for battery SOC design window because of the impacts on total battery size and life.


SOC design window is a key factor in battery sizing:

$$kWh_{total} = \frac{kWh_{useable}}{SOC\ window}$$

Battery SOC swing is a strong function of driving habits:

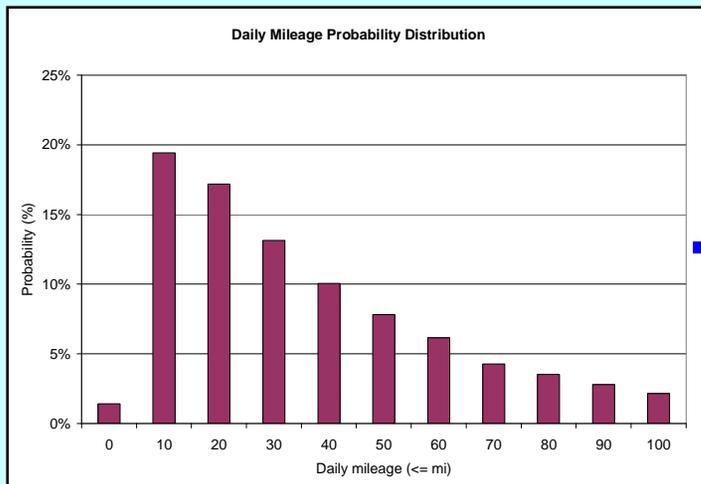


Battery cycle life is a strong function of SOC swing:

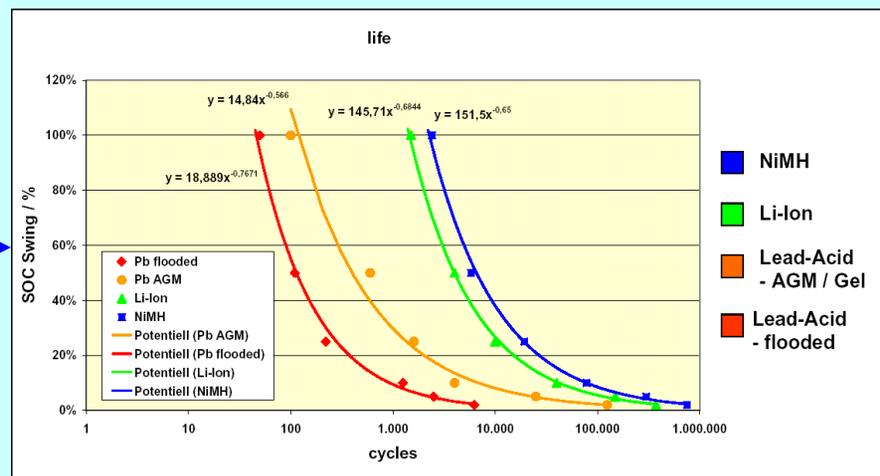

Battery SOC Design Window


Battery SOC design curve for 15 year cycle life

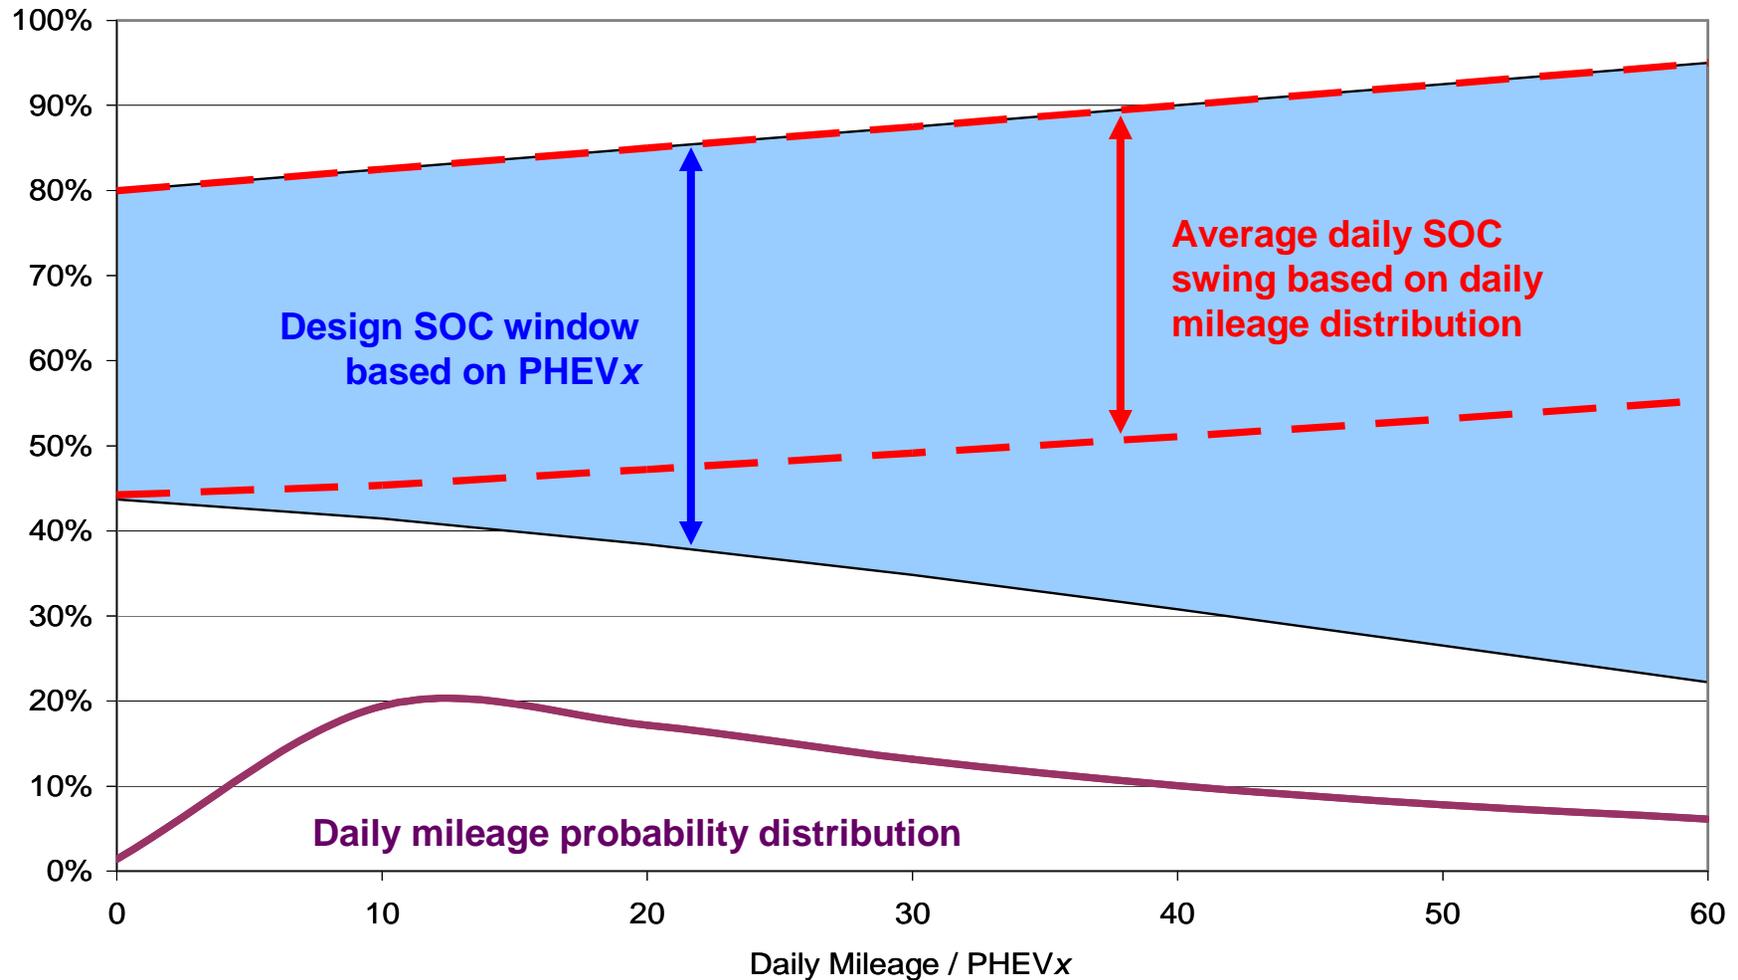

Operating Strategy Options

All-Electric or Blended


All-Electric

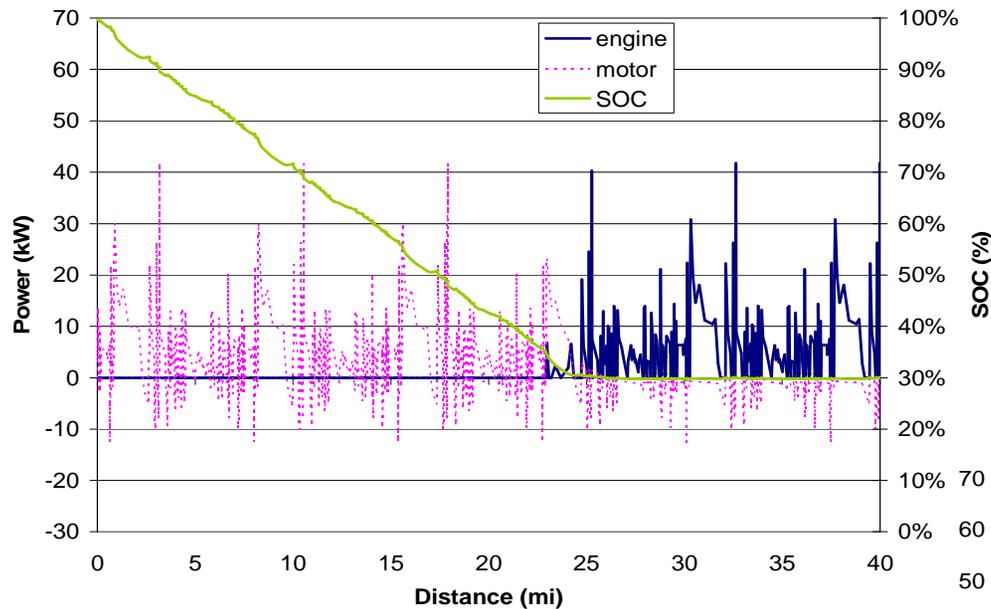

- Engine turns on when battery reaches low state of charge
- Requires high power battery and motor



- Engine turns on when power exceeds battery power capability
- Engine only provides load that exceeds battery power capability

Blended

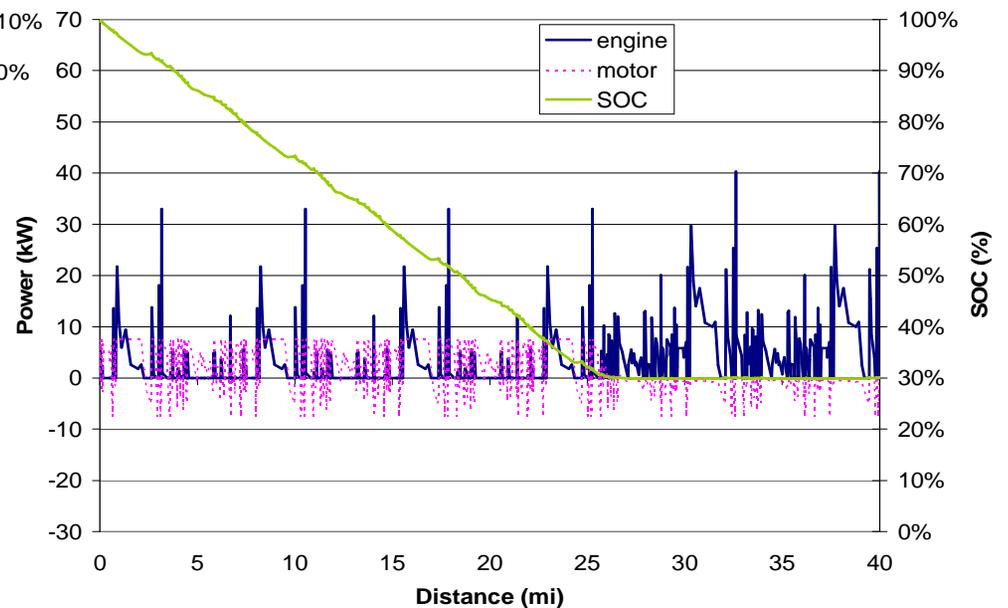

Real Driving Survey Data


- Provides valuable insight into travel behavior
- GPS augmented surveys supply details needed for vehicle simulation

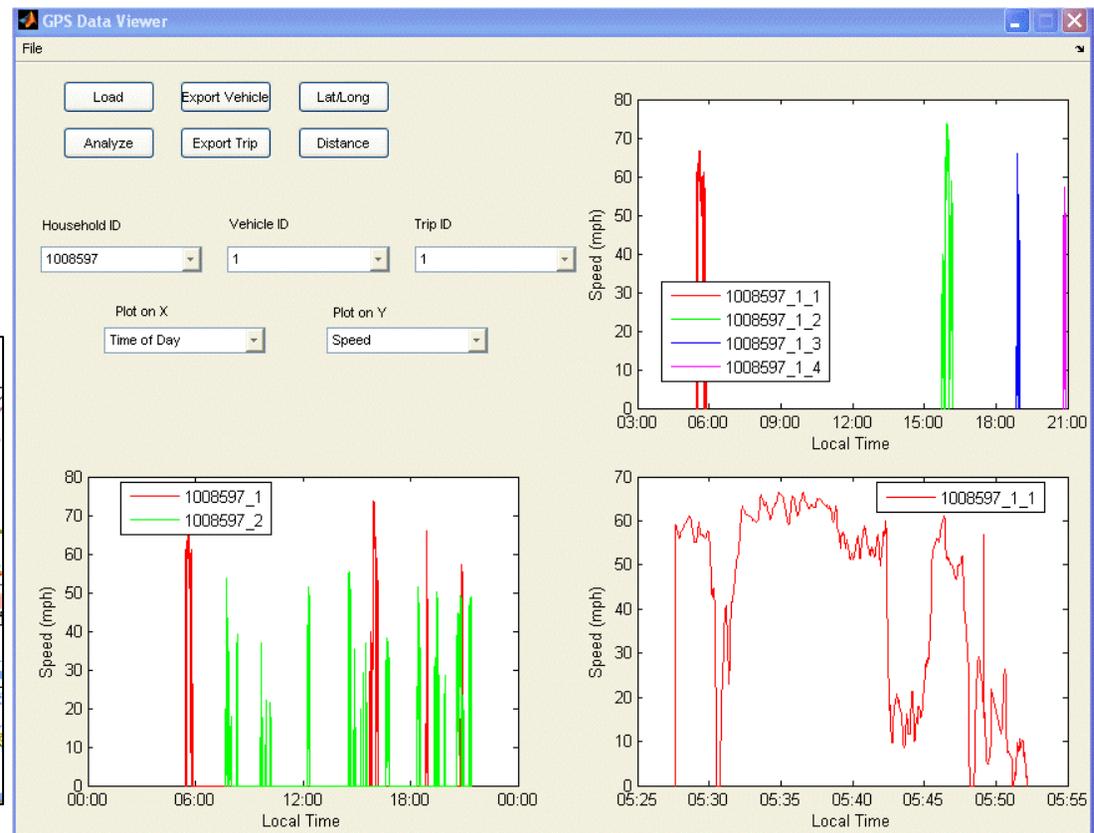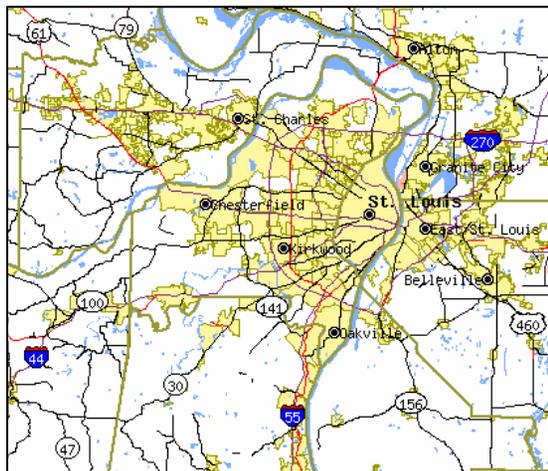


St. Louis Travel Data Analysis

Daily Driving Distance Similar to 1995 NPTS Data

St. Louis HHTS Data

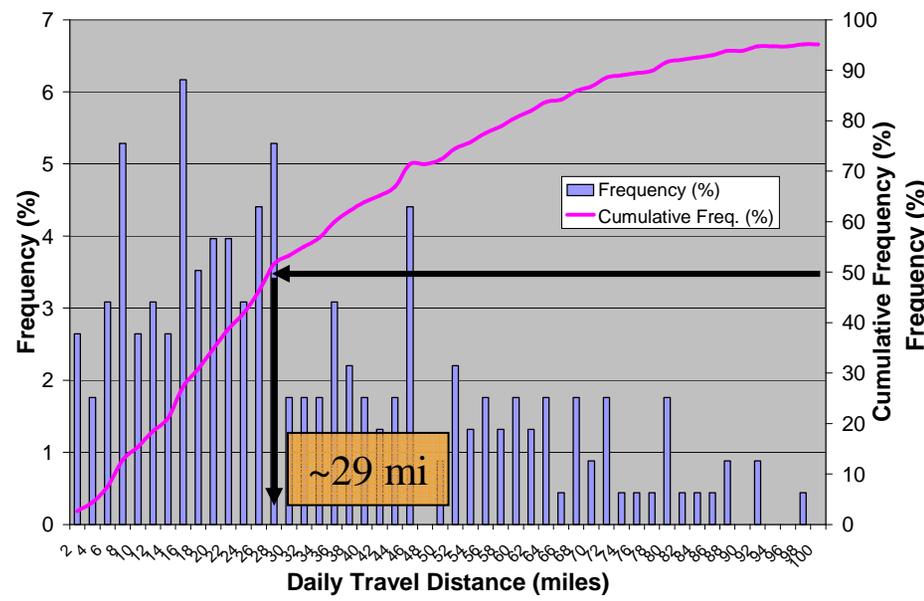


1995 NPTS Data

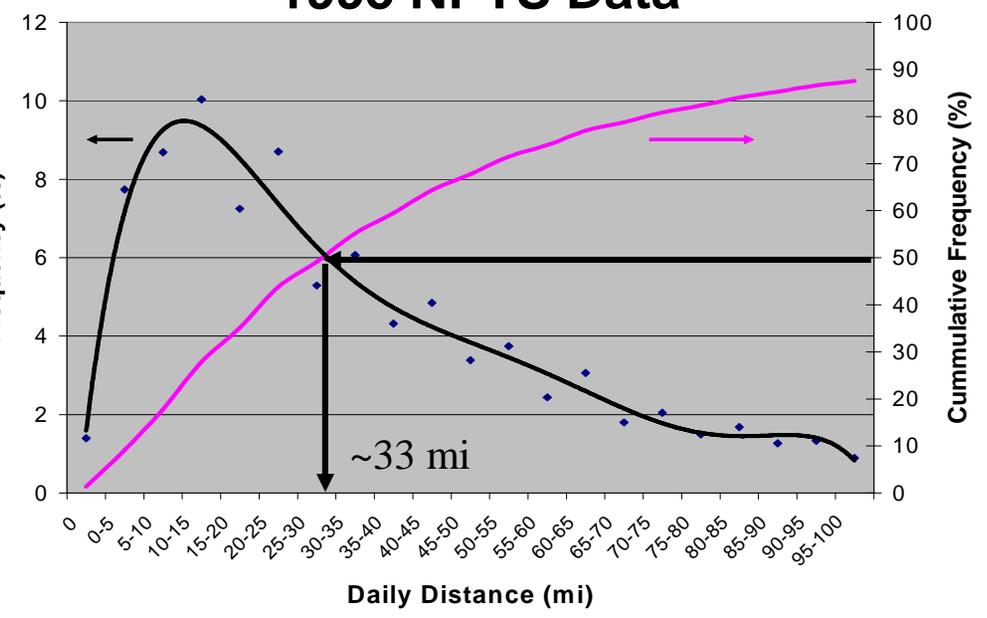

- St. Louis data set includes 227 vehicles from 147 households
- Complete second by second driving profile for one day
- 8650 miles of travel
- St. Louis data set is a small sample of real data
- NPTS data is generated from mileage estimates


Consumption Distribution

Many PHEVs Better than Rated Values

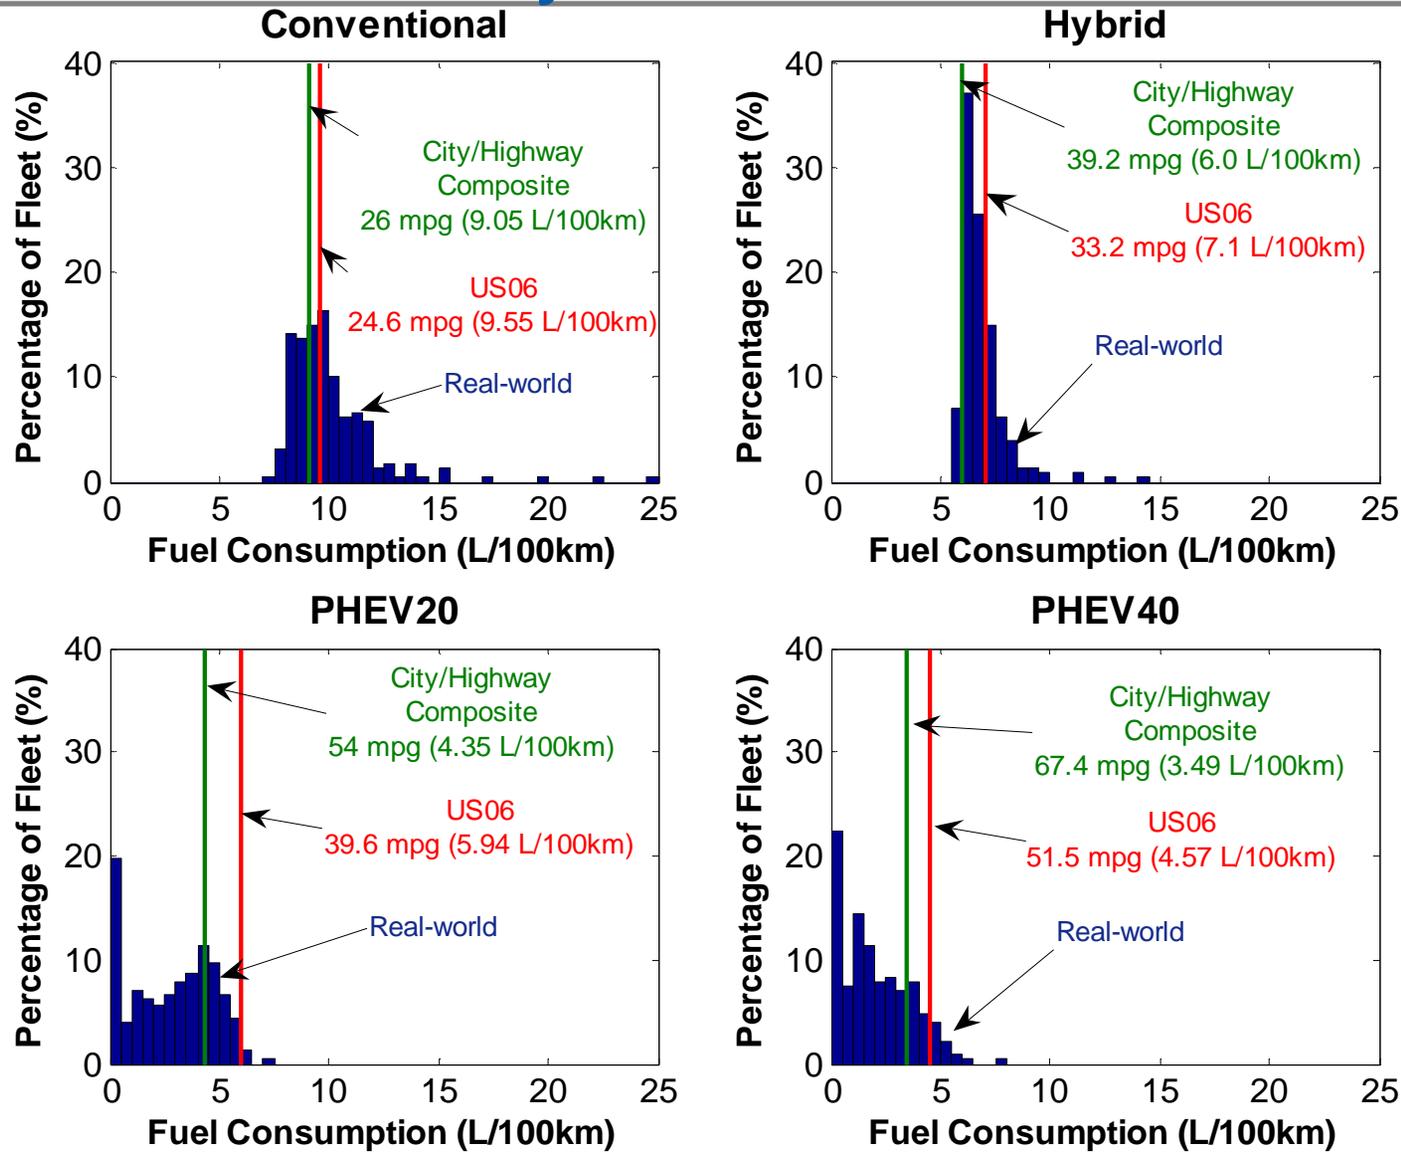

PHEVs Reduce Fuel Consumption By >50% On Real-World Driving Cycles

227 vehicles from St. Louis each modeled as a conventional, hybrid and PHEV


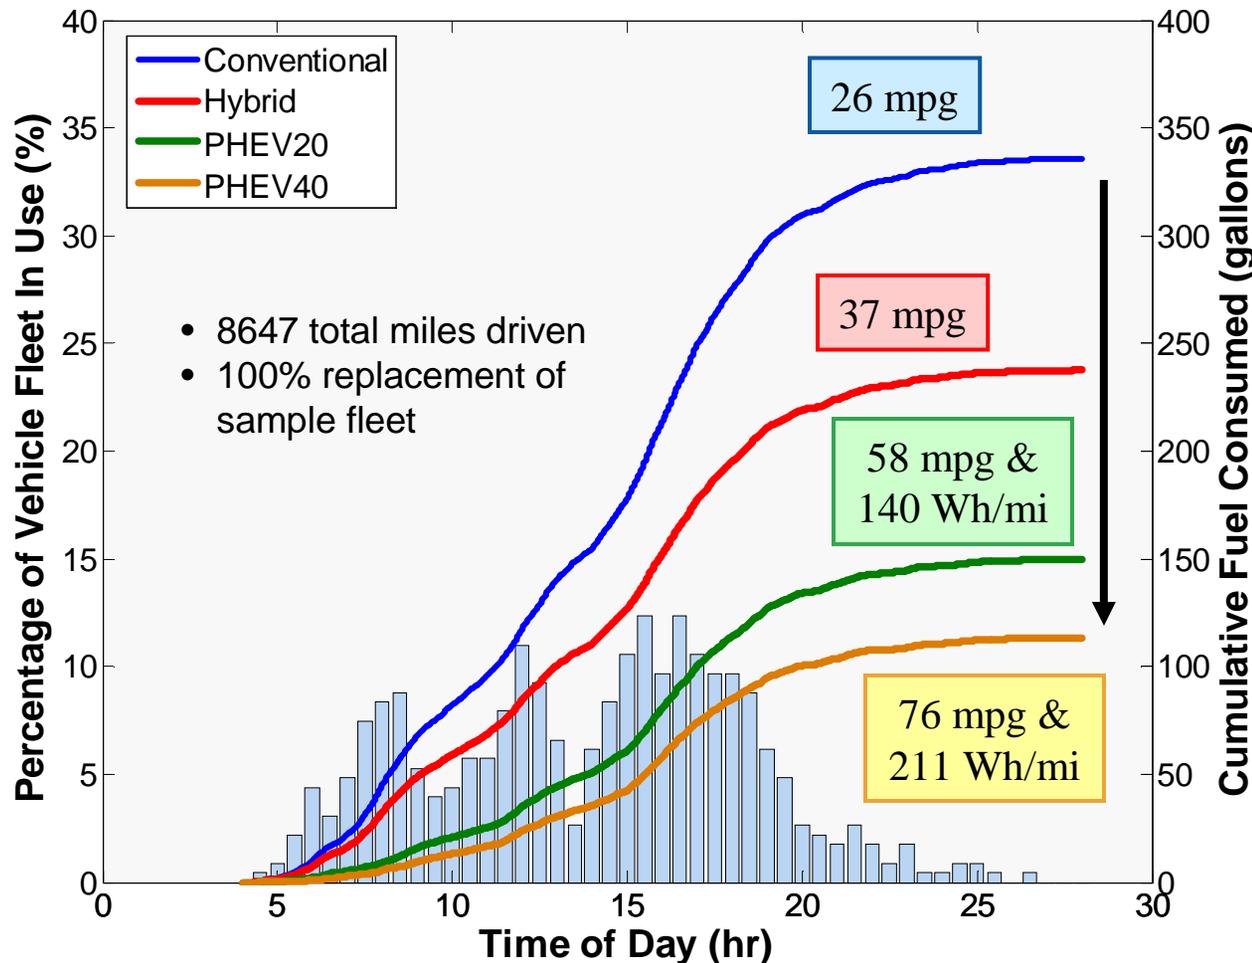


	Average Daily Costs		
	Gas.	Elec.	¢/mi
CV	\$3.45	---	9.1
HEV	\$2.48	---	6.5
PHEV20	\$1.58	\$0.48	5.4
PHEV40	\$1.21	\$0.72	5.1

Assumes \$2.41/gal and 9¢/kWh

PHEVs:
>40% reduction in energy costs
>\$500 annual savings

Simulated In-Use All-Electric Range Distribution

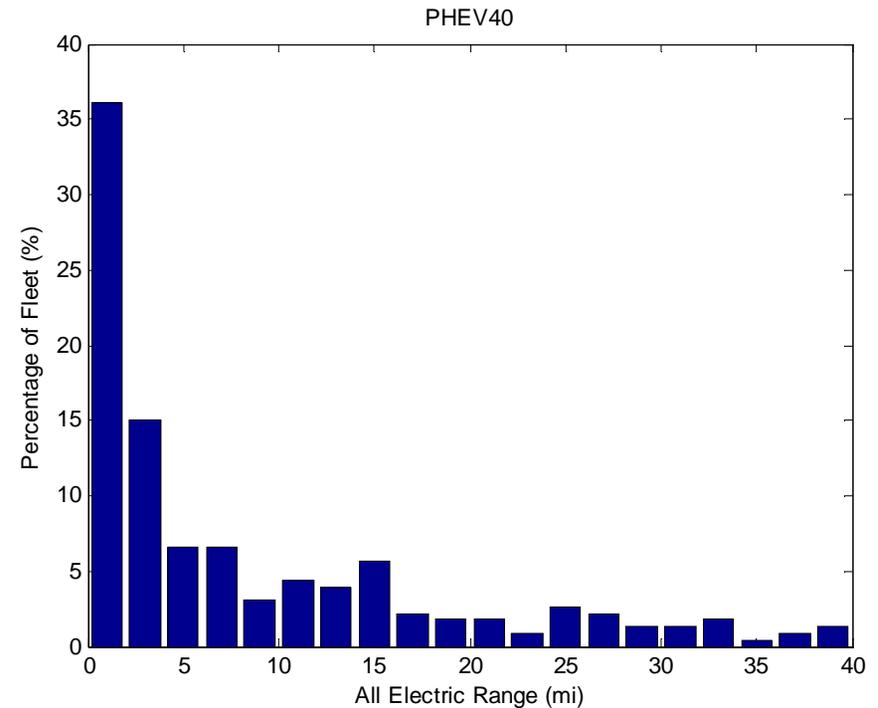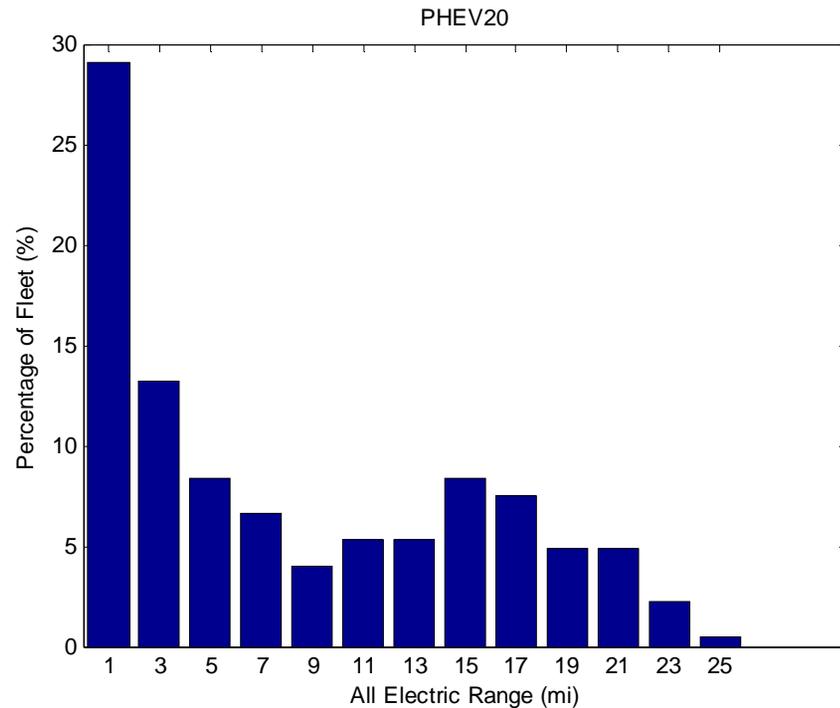

- Vehicles were designed to operate all electrically on UDDS
- Power demands of real profiles exceed UDDS peak power within the first few miles

Fuel Economy and All-Electric Range Comparison


- Significant difference between rated (EPA drive cycles) and real-world median values for PHEVs
 - Consumers likely to observe fuel economy higher than rated value in daily driving
 - Vehicles designed with all-electric range likely to operate in a blended mode to meet driver demands

	<i>Fuel Economy (mpg) **</i>		<i>All Electric Range (mi)</i>	
	Rated	Median	Rated	Median
Conventional	26	24.4	n/a	n/a
HEV	39.2	35.8	n/a	n/a
PHEV20	54	70.2	22.3	5.6
PHEV40	67.4	133.6	35.8	3.8


** Fuel economy values do not include electrical energy consumption

PHEV20 Savings Relative to Conventional and HEV

- Savings relative to conventional are almost entirely distance dependent
- Savings relative to HEV are distance dependent up to PHEV distance then constant

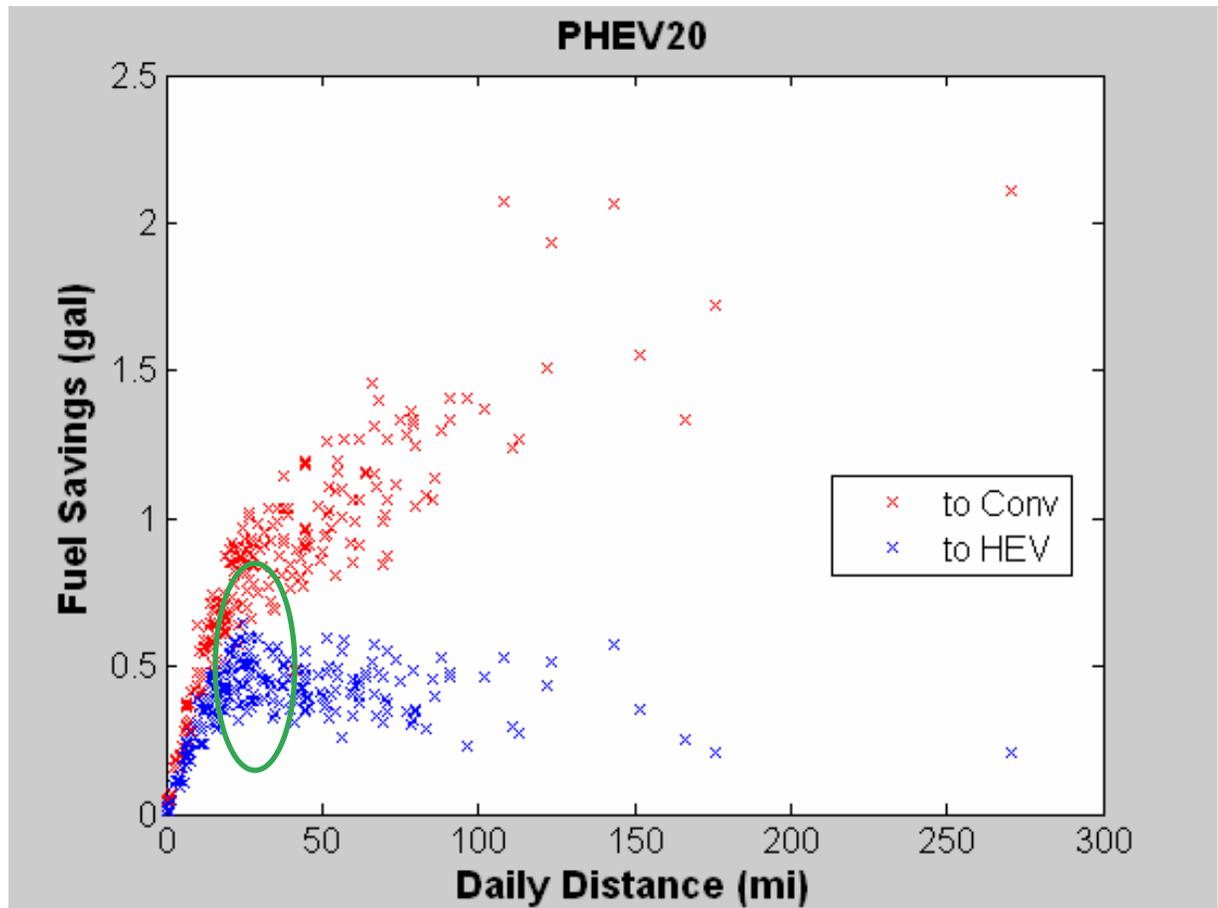

Deep Dive into Real-World PHEV Simulations

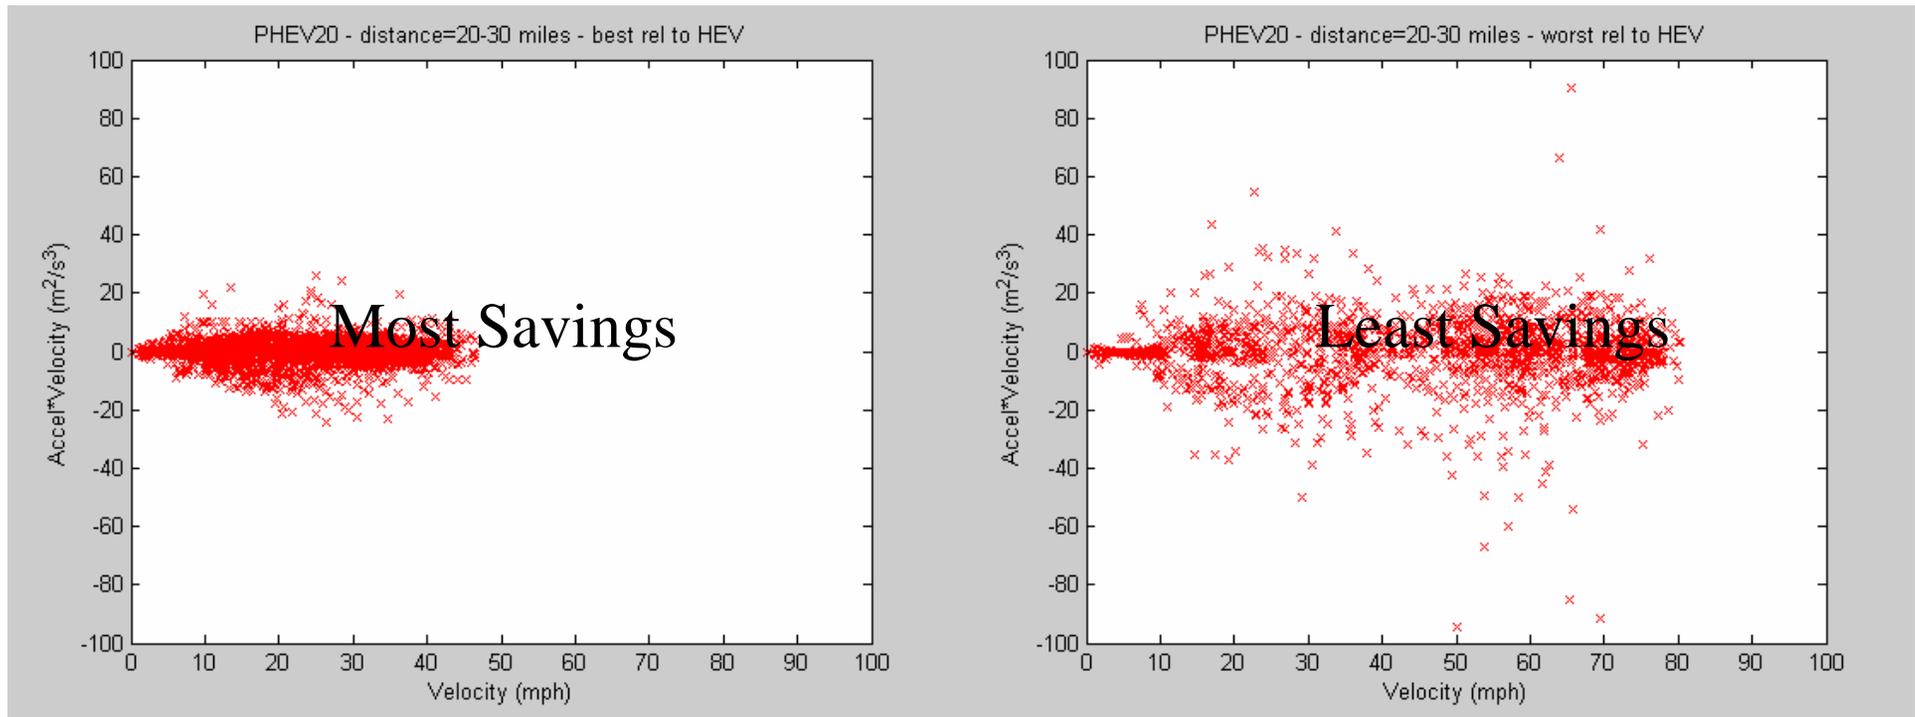

Insights:

The PHEV20s that saved the most fuel relative to an HEV travel ~25 miles with speeds under 60 mph and light accelerations

The PHEV20s that saved the least fuel relative to the HEV in the 20-30 mile range had periods of 60+ mph highway driving and the accelerations were significantly more aggressive

Summary and Conclusions

- PHEVs provide petroleum displacement through fuel flexibility
- Design needs to consider a spectrum of stakeholder objectives
- Analysis of real-world travel behavior provides perspective on design challenges
 - Vehicles designed as all-electric likely to operate as blended
 - What's emissions impact of real-world blended operation
- In-use petroleum displacement not tied to all-electric range
 - Consider *energy equivalent* all-electric range
- PHEV benefit is strongly related to distance and aggressiveness of real-world usage