


## **APPENDIX G**

Diesel Fuel Lubricity: Pump Wear Data

■

Pump wear data for conventional heavy-duty diesel engine fuel injection systems are shown in Figure 1 below as a function of diesel fuel lubricity level as indicated by the Scuffing Load Ball on Cylinder Lubricity Evaluator (SLBOCLE) test. An acceptable pump wear rating for these pumps is a pump wear rating of four or less. These data support a SLBOCLE scuffing load of 3100 grams or higher as being protective of conventional pumps.


**Figure 1 Pump Wear Data for Conventional Pumps<sup>1</sup>**

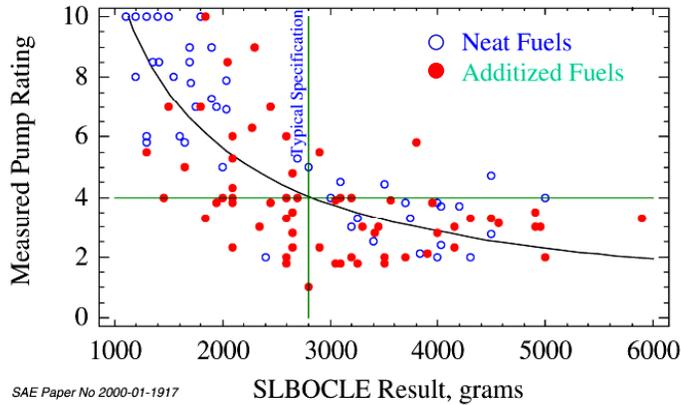

G020081  
01/23/02 DieselFuelLube mrb Nikanjam 3

Pump wear data for advanced technology high pressure pumps are shown in Figure 2 below. The diesel fuel lubricity as measured by the High Frequency Reciprocating Rig (HFRR) test is shown as a function of measured Bosch wear rating. An acceptable wear rating for these pumps is a value of 3.5 or less. These data indicate that fuels that produce maximum wear scar diameters of approximately 460 microns or less result in acceptable wear ratings.

**Figure 2 Pump Wear Data for Advanced Technology Pumps<sup>a, 2</sup>**

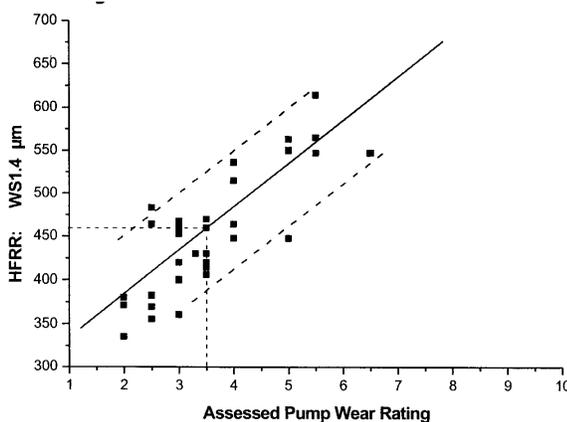

→ Linear regression: Pump wear 3.5 ==> WS1.4 = 454 μm

© 2003 Bosch. All rights reserved. Bosch assumes no liability for the use of this information in the event of industrial property rights.  
All other trademarks are the property of their respective owners. Bosch is not responsible for any damage or loss of property to third parties.

<sup>a</sup> Used by permission from Bosch Corp, May 2003

- 
- <sup>1</sup> ASTM ballot, Sub Committee: D02.E0, Revision of D-975-01 Specification for Diesel Fuel Oils to include a lubricity specification, Background & Supporting Documents & References”, Issue Date April 25, 2003.
- <sup>2</sup> Meyer, Klaus and Livingston, Thomas C., Bosch Corporation, CARB Fuels Workshop Presentation, “ Diesel Fuel Lubricity Requirements for Light Duty Fuel Injection Equipment”, Sacramento, CA, Feb. 20, 2003.