# State of California AIR RESOURCES BOARD

2015 Report on Air Emissions from Facilities Burning Waste Tires in California

**June 2015** 

## **Table of Contents**

Executive Summary	1
Introduction	3
Facility Information	
Criteria Pollutant Emissions	6
Toxic Pollutant Emissions	6
Conclusions	7
References	

<sup>&</sup>quot;The energy challenge facing California is real. Every Californian needs to take immediate action to reduce energy consumption. For a list of simple ways you can reduce demand and cut your energy costs, see our website at <a href="https://www.arb.ca.gov">www.arb.ca.gov</a>"

## **Executive Summary**

This report summarizes pollutant emissions from facilities in California that burned waste tires as a supplemental fuel in 2013, the most recent year for which complete data are available. The report has been prepared pursuant to section 42889.4 of the California Public Resources Code.

Twelve facilities in the state of California are permitted to burn waste tires in combination with coal, coke, or biomass. Of these, four cement plants burned 9.7 million tires as a supplemental fuel in 2013. These data were compiled from local air districts that have jurisdiction to grant air quality permits, and establish, track, and enforce emissions limits.

Emissions data reported are from the combustion devices (kilns and boilers) where waste tires were actually burned. It does not include emissions from other processes such as internal combustion engines, process heaters, etc. Table ES-1 summarizes the total emissions from kilns and boilers at the four facilities where waste tires were burned in 2013. Tires made up between 9 and 39 percent of the total fuel burned. Because tires are burned with other fuels, the emissions are for the whole combined-fuel process (e.g., coal, coke and tires), not just the waste tire portion.

Table ES-1. Criteria and toxic pollutant emissions from devices which burn tire-derived fuel in 2013

Criteria Pollutants					
Total Organic Gases	104 tons/year				
Reactive Organic Gases	85 tons/year				
Oxides of Nitrogen	6,013 tons/year				
Oxides of Sulfur	405 tons/year				
Carbon Monoxide	4,468 tons/year				
Total Particulate Matter	294 tons/year				
Particulate Matter ≤ 10 micrometers	237 tons/year				
Particulate Matter ≤ 2.5 micrometers	146 tons/year				
Toxic Pollutants					
Acetaldehyde	54 pounds/year				
Benzene	69 pounds/year				
Formaldehyde	192 pounds/year				
Hydrogen Chloride	6,322 pounds/year (3.2 tons/year)				
Total Metals	65 pounds/year				
Total Polycyclic Aromatic Hydrocarbons	8 pounds/year				
Hexavalent Chromium	6,461 milligrams/year (6.5 grams/year)				
Dioxins	6 milligrams/year				
Furans	6 milligrams/year				

### Introduction

Pursuant to section 42889.4 of the California Public Resources Code, since 2002, the Air Resources Board (ARB) has published a report summarizing criteria and toxic air pollutant emissions generated from facilities that burn waste tires as a supplemental fuel. Specifically, this section requires the following:

If facilities are permitted to burn tires in the previous calendar year, the State Air Resources Board, in conjunction with air pollution control districts and air quality management districts, shall post on its Web site, updated on or before July 1 of the subsequent year, information summarizing the types and quantities of air emissions, if any, from those facilities.

Waste tires are defined in section 42807 of the Public Resources Code as follows:


"Waste tire" means a tire that is no longer mounted on a vehicle and is no longer suitable for use as a vehicle tire due to wear, damage, or deviation from the manufacturer's original specifications. A waste tire includes a repairable tire, scrap tire, altered waste tire, and a used tire that is not organized for inspection and resale by size in a rack or a stack in accordance with Section 42806.5, but does not include a tire derived product or crumb rubber.

Tires have a heating value of approximately 13,000 to 15,000 British Thermal Units (BTUs) per pound, roughly the same as a superior quality coal. In California, waste tires are used as tire-derived fuel in two applications: cement kilns that often burn coal or coke, and cogeneration facilities producing electric power, generally from biomass.

This report summarizes the emissions from the combustion processes (kilns and boilers) where tires were actually burned, rather than the total facility emissions. A more comprehensive emissions inventory for all the operations at each facility is available on the website www.arb.ca.gov/app/emsinv/facinfo/facinfo.php.

## **Facility Information**

Twelve facilities in the State are permitted to burn tire-derived fuel. Figure 1 shows the names and location of these facilities. Of these, four facilities, all cement plants, reported burning tires as a supplemental fuel in 2013. These facilities are bolded in Figure 1.

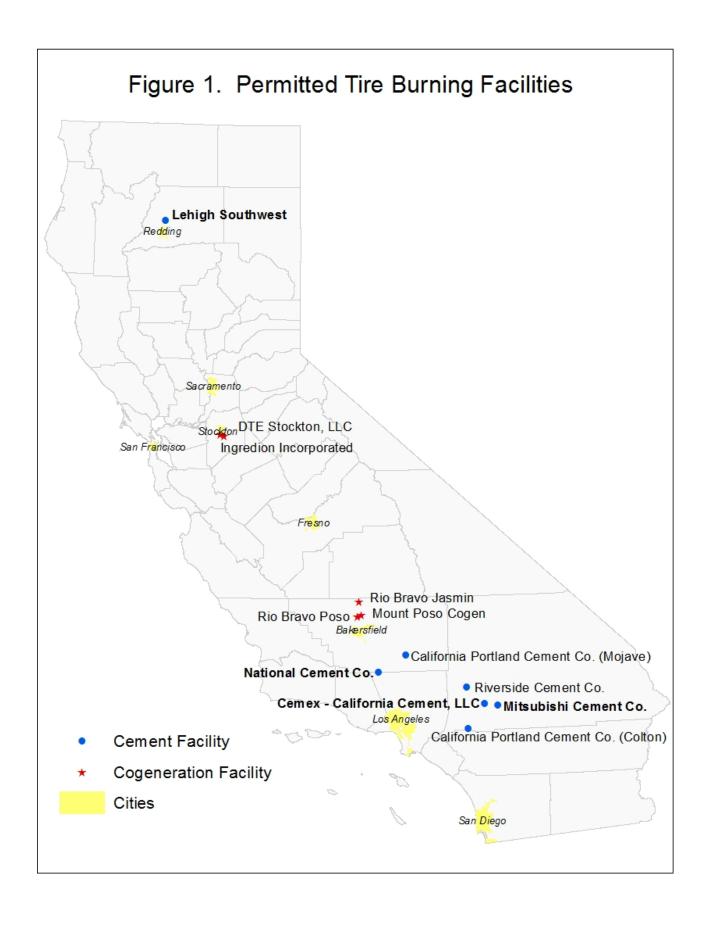

In 2013, about 9.7 million waste tires were burned by these facilities. In all of these facilities, the tires were burned in combination with coal, coke, or biomass. Table 1 displays the number of tires burned at each facility, along with the percentage of tires used as part of the total fuel mix.

Table 1. Number of tires burned and percentage of tires in total fuel burned by

facilities permitted to burn waste tires in 2013

	Facility Name	Tires Burned	Total Fuel	Tires in
Air District	And Location	in 2013	(Tons)	Fuel (%)
South Coast	California Portland Cement Company Colton, CA	0		0
Eastern Kern	California Portland Cement Company Mojave, CA	0		0
Mojave Desert	Cemex – California Cement, LLC Apple Valley, CA	3.1 million	248,048	12
Shasta County	Lehigh Southwest Redding, CA	1.1 million	43,471	24
Mojave Desert	Mitsubishi Cement Company Lucerne Valley, CA	2.0 million	214,926	9
Eastern Kern	National Cement Company Lebec, CA	3.5 million	89,365	39
Mojave Desert	Riverside Cement Company Oro Grande, CA	0		0
San Joaquin Valley	Mount Poso Cogeneration Company Bakersfield, CA	0		0
San Joaquin Valley	DTE Stockton, LLC Stockton, CA	0		0
San Joaquin Valley	Rio Bravo Jasmin Bakersfield, CA	0		0
San Joaquin Valley	Rio Bravo Poso Bakersfield, CA	0		0
San Joaquin Valley	Ingredion Incorporated Stockton, CA	0		0
T	otal Tires Burned <sup>(1)</sup>	9.7 million		

<sup>(1)</sup> Total may differ from the sum of tires burned at individual facilities due to rounding.

As shown in Table 1, the percentage of tires burned as part of the total fuel mix ranged from 9 to 39 percent. The number of tires burned and total weight were reported by the facility operators to the local air districts. Under State law, local air districts are responsible for granting air quality permits, establishing and enforcing emissions limits, and tracking facility emissions.

### **Criteria Pollutant Emissions**

Table 2 summarizes the criteria pollutant emissions from the cement kilns or boilers where tires were part of the fuel mix burned in 2013. The data were reported by the local air districts to ARB's California Emissions Inventory Database and Reporting System (CEIDARS). The pollutants reported below are total organic gases (TOG), reactive organic gases (ROG), oxides of nitrogen (NOx), oxides of sulfur (SOx), carbon monoxide (CO), total particulate matter (PM), particulate matter 10 micrometers or less in diameter (PM<sub>10</sub>), and particulate matter 2.5 micrometers or less in diameter (PM<sub>2.5</sub>).

Table 2. Criteria pollutant emissions from kilns and boilers where tire-derived fuel was burned in 2013 (tons per year)

The made barried in 2010 (tonic per year)								
	TOG	ROG	NOx	SOx	СО	PM	PM <sub>10</sub>	$PM_{2.5}$
Cement Facilities								
Cemex – California Cement	14	11	2,151	171	619	176	124	73
Lehigh Southwest	21	17	514	25	757	61	61	38
Mitsubishi Cement	48	40	2,354	200	1,323	52	48	32
National Cement	20	17	994	9	1,769	5	5	3
Total (1)	104	85	6,013	405	4,468	294	237	146

<sup>(1)</sup> Total may differ from the sum of individual facility emissions due to rounding.

Because tires are burned in combination with other fuels, the data represent emissions from the whole combined-fuel process (e.g., coal and tires), not just the tire-derived fuel portion.

#### **Toxic Pollutant Emissions**

Table 3 summarizes the estimated toxic air pollutant emissions from the cement kilns and boilers where tires were part of the fuel mix burned in 2013. In most cases, the toxic emission estimates are reported in pounds per year. However, due to the comparatively lower emission rates of hexavalent chromium, dioxins and furans, the estimates for these substances are reported in units of milligrams per year.

Table 3. Estimated toxic pollutant emissions from kilns and boilers where tirederived fuel was burned in 2013

	Acetaldehyde	Benzene	Formaldehyde	Hydrogen Chloride	Total Metals	Total PAHs <sup>(2)</sup>	Hexavalent Chromium	Dioxins	Furans
	Pounds per year Milligrams per year							year	
Cement Facilities									
Cemex – California Cement	23	29	80	2,632	27	3	2,690	3	3
Lehigh Southwest	4	5	14	461	5	1	471	<1	<1
Mitsubishi Cement	20	25	69	2,281	24	3	2,331	2	2
National Cement	8	10	29	948	10	1	969	1	1
Total (1)	54	69	192	6,322	65	8	6,461	6	6

<sup>(1)</sup> Total may differ from the sum of individual facility emissions due to rounding.

(2) Polycyclic Aromatic Hydrocarbons

The estimated emissions in Table 3 are based on source tests in which tires were burned in combination with other fuels. As such, the data represent emissions from the whole combined-fuel process (e.g., coal and tires), not just the tire-derived fuel portion. Cement plant emission factors were derived from a source test at Mitsubishi Cement. When cogeneration facilities report the burning of tires, emissions are calculated using emission factors based on a source test at Stockton Cogeneration (now Ingredion Incorporated).

#### Conclusions

Of twelve facilities permitted to burn waste tires in California, four burned tires as a supplemental fuel in 2013. These facilities burned approximately 9.7 million waste tires in combination with coal, coke, or biomass. As is typical for combustion sources, the bulk of emissions for the combined fuel were criteria pollutants, particularly  $NO_x$  and CO, with comparatively lower  $SO_x$ ,  $PM_{10}$ ,  $PM_{2.5}$ , TOG and ROG. As mentioned previously, emission values in this report represent total emissions only from devices which burned tires.

#### References

- 1. Coal, Coke, and Tires burned process rates and activity data. Excel file provided by Donal Jonio, Shasta County AQMD, May 26, 2015.
- Coal, Coke, and Tires burned process rates and activity data. Excel file provided by Chris Anderson, Mojave Desert and Antelope Valley County AQMD, May 27, 2015.
- 3. Coal, Coke, and Tires burned process rates and activity data. Excel file provided by Wunna Aung, Eastern Kern APCD, February 17, 2015.
- 4. Coal, Coke, and Tires burned process rates and activity data. Excel file provided by Brant Botill, San Joaquin Valley APCD, May 11, 2015.
- 5. Coal, Coke, and Tires burned process rates and activity data. Email from Ali Ghasemi, South Coast AQMD, May 22, 2014.
- 6. Year 2013 Criteria Pollutants Data: Extracted from CEIDARS database. Report Run date: June 16, 2015.
- 7. 2014 Report on Air Emissions from Facilities Burning Waste Tires in California, State of California Air Resources Board: July, 2014.