

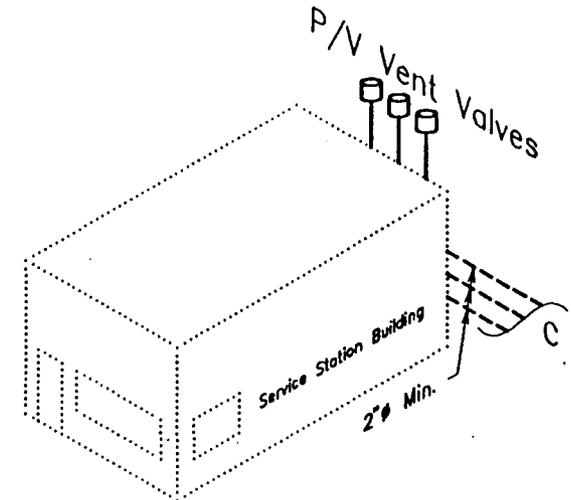
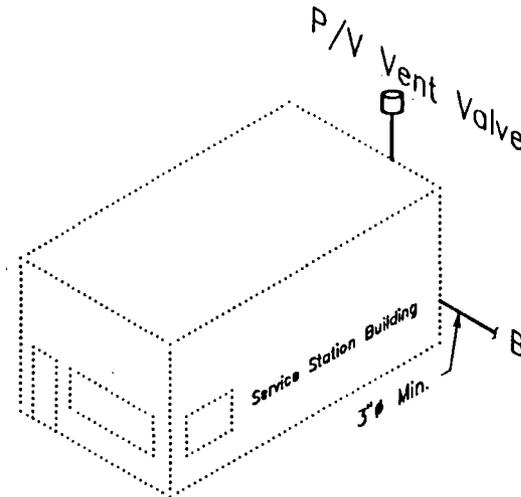
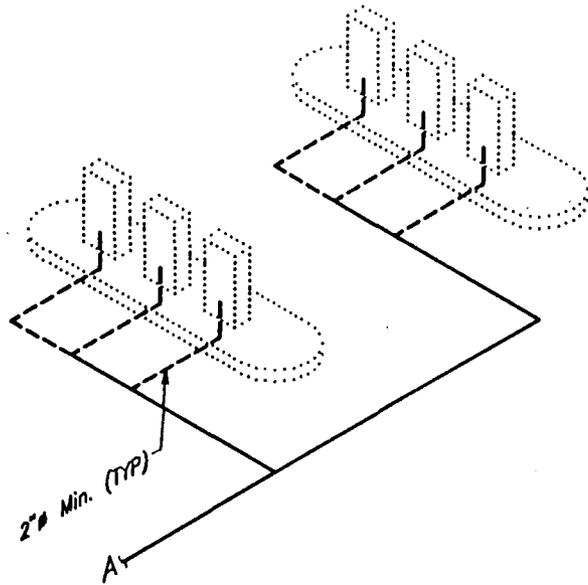


EXECUTIVE ORDER G-70-23-AC  
 FIGURE 2A  
 EXXON BALANCED VAPOR RECOVERY SYSTEM

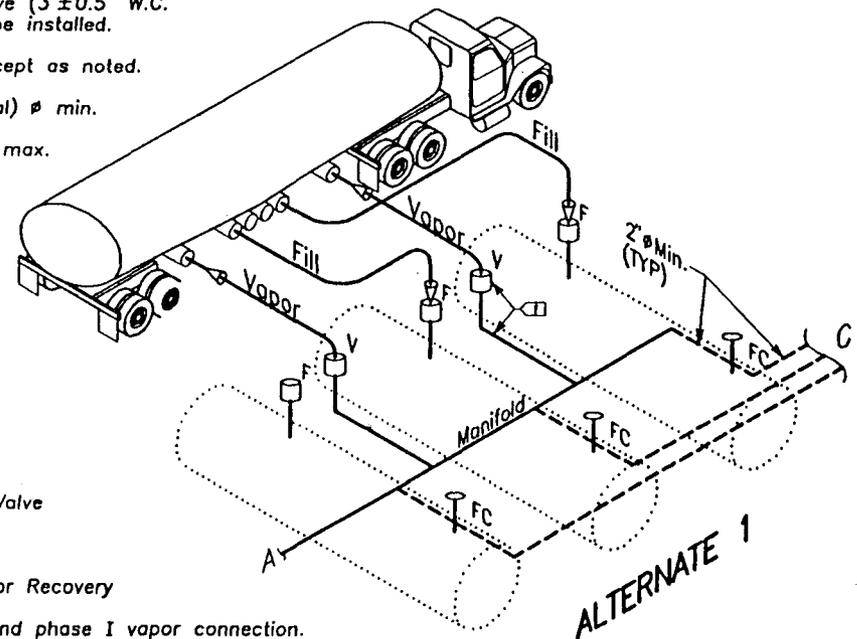

**NOTES:**

1. Vapor hose(s) to truck **MUST** return vapors to the cargo compartment from which product is being delivered. **IN ADDITION**, a minimum of one phase I vapor hose must be connected while delivering with two product hoses. **ALSO**, a minimum of two phase I vapor hoses must be connected while delivering with three product hoses.
2. CARB certified pressure vacuum vent valve ( $3'' \pm 0.5''$  W.C. pressure and  $B'' \pm 2''$  W.C. vacuum) shall be installed.
3. All lines are nominal #'s & 3" min. except as noted.
4. Truck vapor return hoses are 3" (nominal) # min.
5. Truck delivery hoses are 4" (nominal) # max.

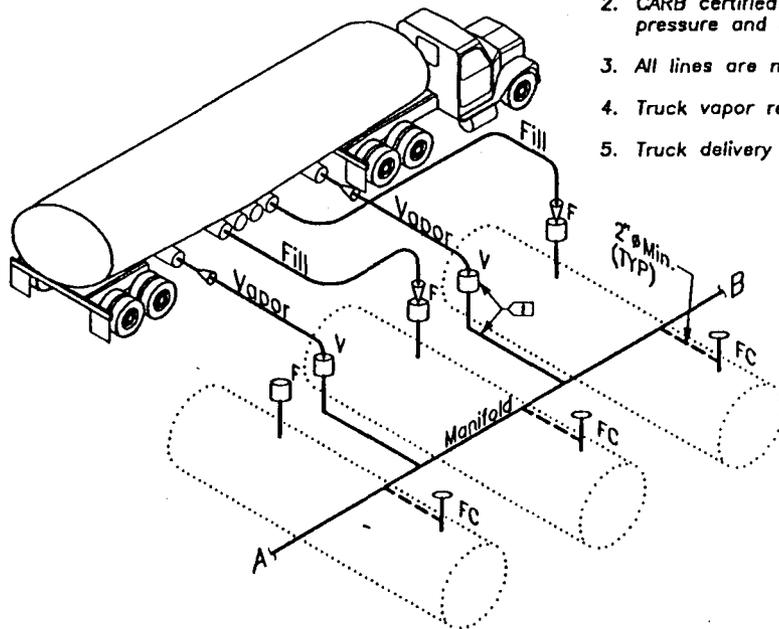

**KEY:**

- FC = Float Check Valve
- F = Fill Line
- V = Phase I Vapor Recovery
- 1 = Optional second phase I vapor connection.