



Healy Model 75 Series Low Perm Hose Assemblies

Warning  Follow all federal, state, and local laws governing the installation of this product and the entire system. When no other regulations apply, follow NFPA 30, 30A, and 70 from the National Fire Protection Association. Failure to do so could result in severe injury, death, serious property damage and/or environmental contamination.

Warning  Highly flammable vapors or liquids may be present in the environment in which this equipment is installed or serviced. Installing or working on this equipment means working in an environment that presents risks of severe injury or death if instructions and standard industry practices are not followed. Follow all applicable codes governing the installation and servicing of this product and the entire system.

Danger  Always lock out and tag electrical circuit breakers while installing or servicing this equipment and related equipment. A potentially lethal electrical shock hazard and the possibility of an explosion or fire from a spark can result if the electrical circuit breakers are accidentally turned on during installation or servicing. Do not smoke while working on or near this equipment, and use only non-sparking tools.

Healy 75 Series Hoses and Hose Assemblies should be serviced by a Healy Certified Technician. However, GDF Owner / Operator can remove and install hanging hardware (nozzle, curb hose, breakaway, flow limiter and whip hose). Hoses should be inspected for kinks, flat spots, abraded outer cover (wire strands visible) and leaking fittings on a weekly basis.

Note: It is the responsibility of the installer to be familiar with the current requirements of state, federal, local codes and air district rules and regulations for installation of gasoline dispensing equipment. It is the responsibility of the installer to be aware of all the necessary safety precautions and site safety requirements to assure a safe and trouble free installation.


The warranty sheet provided with the component is to remain with the component, and must be provided to the end-user.

1. Hose Length

Select the correct whip hose and curb hose by selecting the correct thread type and hose length. The maximum length of the hose assembly shall not exceed eighteen (18) feet. Lengths greater than eighteen (18) feet are permitted if acceptable to authorities having jurisdiction.

2. Installation Instructions

- 2.1 Lubricate any O-rings or Quad Seals before installing the hose assembly into an adaptor, breakaway or nozzle assembly to make it easier to install and prevent the seal from getting cut. Motor oil (any weight) is acceptable for lubricating an O-ring or Quad Seal.
- 2.2 Connect hose assembly to nozzle, hose adaptor, breakaway, or flow limiter (if equipped).
- 2.3 Tighten hose connections between 35 to 70 foot pounds.

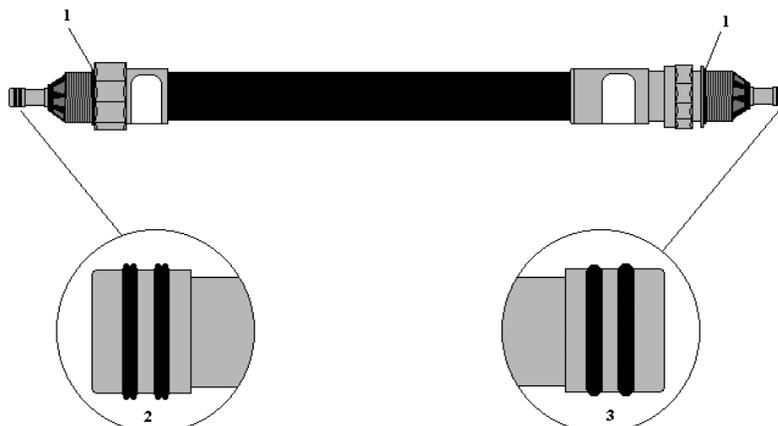

**Rule of Thumb: O-rings (item 3) to Nozzle and Hose Adaptor
Quad Seals (item 2) to Breakaway (or Flow Limiter)**

3. Hose Installation Functional Check

Note: The following checks shall be conducted after installation or repair of the hose assembly with the dispenser authorized and ready to dispense fuel.

- 3.1 Liquid Leak – Liquid gasoline visible on the hose assembly indicates a damaged or improperly installed O-ring, Healy Part No. HB-2 (item 1 in figure above). This O-ring seals the hose fitting to the nozzle and the adaptor. Replace the O-ring(s) if necessary.
- 3.2 Meter Creep – Dispenser gasoline display counting up when the nozzle is not dispensing gasoline indicates a damaged or improperly installed quad seals. The quad seals (2) are used on the end of the hose vapor tube that attaches to the breakaway assembly (or flow limiter, if equipped). Healy Part No. HB-4 (item 2 in figure above). Replace the quad seal(s) if necessary.
- 3.3 Meter Creep – Dispenser gasoline display counting up when the nozzle is not dispensing gasoline indicates a damaged or improperly installed O-ring seals (2) on the end of the hose vapor tube that connects to the nozzle. Healy Part No. 291 (item 3 in figure above). Replace these O-ring(s) if necessary.

4. Inspection and Maintenance

- Hose assemblies should be inspected weekly.
- Check/Inspect the hose assembly for leaks, kinks, blisters, bulges, flattened areas, soft spots, or any cuts, cracks or gouges deep enough and large enough to visibly expose the wire strands reinforcement beneath the cover of the hose.
- Hose assemblies showing signs of any of these issues should be replaced. **Follow Safety/ Lockout procedure.**



Franklin Fueling Systems

www.franklinfueling.com

3760 Marsh Road • Madison, WI 53718, U.S.A.

Tel: +1 608 838 8786 • Fax: +1 608 838 6433

Tel: USA & Canada 1 800 225 9787 • Tel: México 001 800 738 7610

Franklin Fueling Systems GmbH

Rudolf-Diesel-Strasse 20 • 54516 Wittlich, GERMANY

Tel: +49-6571-105-380 • Fax: +49-6571-105-510



Veyance Low Permeation Coaxial Hose

1.0 Veyance Low Permeation Coaxial Hose

- 1.1 Select the correct whip hose and curb hose by selecting the correct thread type and hose length. The maximum length of the hose assembly shall not exceed eighteen (18) feet. Lengths greater than eighteen (18) feet are permitted if acceptable to authorities having jurisdiction.
- 1.2 This assembly has straight threads and is sealed by an o-ring. Do not use thread sealing compounds on straight threads.
- 1.3 Lubricate any o-ring before installing the hose assembly into an adapter, breakaway or nozzle. Motor oil of any weight can be used for lubricating an o-ring.
- 1.4 Tighten threaded connections to 35 - 50 ft-lbs.
- 1.5 Hose assemblies should be inspected weekly. Check the hose assembly for leaks, kinks, blisters, bulges, flattened areas, soft spots, or any cuts or gouges deep enough to expose the wire reinforcement beneath the cover of the hose. Hose assemblies showing signs of any of these issues should be replaced.

Note: It is the responsibility of the installer to be familiar with the current requirements of state, federal, local codes and air district rules and regulations for installation of gasoline dispensing equipment.

It is also the responsibility of the installer to be aware of all the necessary safety precautions and site safety requirements to assure a safe and trouble free installation.

The warranty tag provided with the component is to remain with component, and must be provided to the end-user.

Veyance Technologies Inc.
703 S. Cleveland Massillon Rd.
Fairlawn, OH 44333 USA
Telephone:1-800-235-4632




2.0 Field Serviceable Hose Components

Note: The following procedures shall be conducted after installation or repair, with the dispenser authorized and ready to dispense fuel.


- 2.1 Liquid gasoline visible on the outer hose indicates a damaged or improperly installed o-ring. Replace the o-ring if necessary.

<u>Fitting Threads</u>	<u>O-ring Part #:</u>
M34 x 1.5	173537188
1-1/4"-18	173537203
1-7/8"-12	173537202

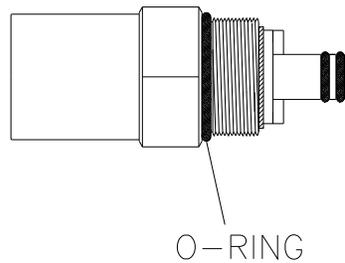

- 2.2 Meter creep (gallons dispensed display on dispenser is counting up when the nozzle is not dispensing gasoline), indicates a damaged or improperly installed o-ring. Replace the o-ring if necessary.

O-ring Part #: 173537082

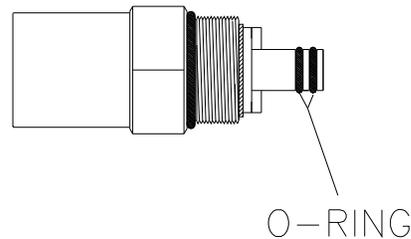

Note: Contact your local distributor or Veyance Customer Service for replacement o-rings.

Veyance Technologies Inc.
703 S. Cleveland Massillon Rd.
Fairlawn, OH 44333 USA
Telephone: 1-800-235-4632

