


Figure 1

Configuration of VST Membrane Processor to Conduct TP-201.3

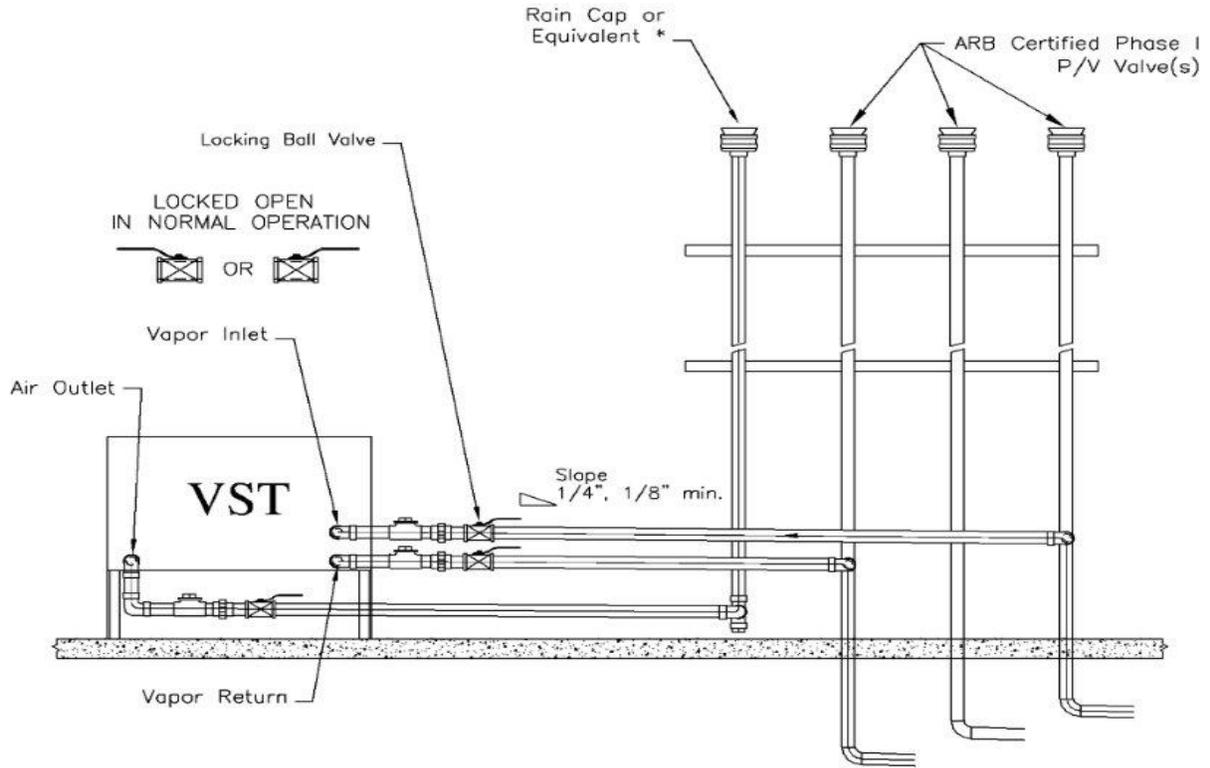

CAUTION: THE HANDLES ON THE LOCKING BALL VALVES MUST NOT BE REMOVED

* If a P/V valve is used, the internal components MUST be removed to allow open venting to the atmosphere.

Figure 2

Configuration of Veeder-Root Vapor Polisher to Conduct TP-201.3

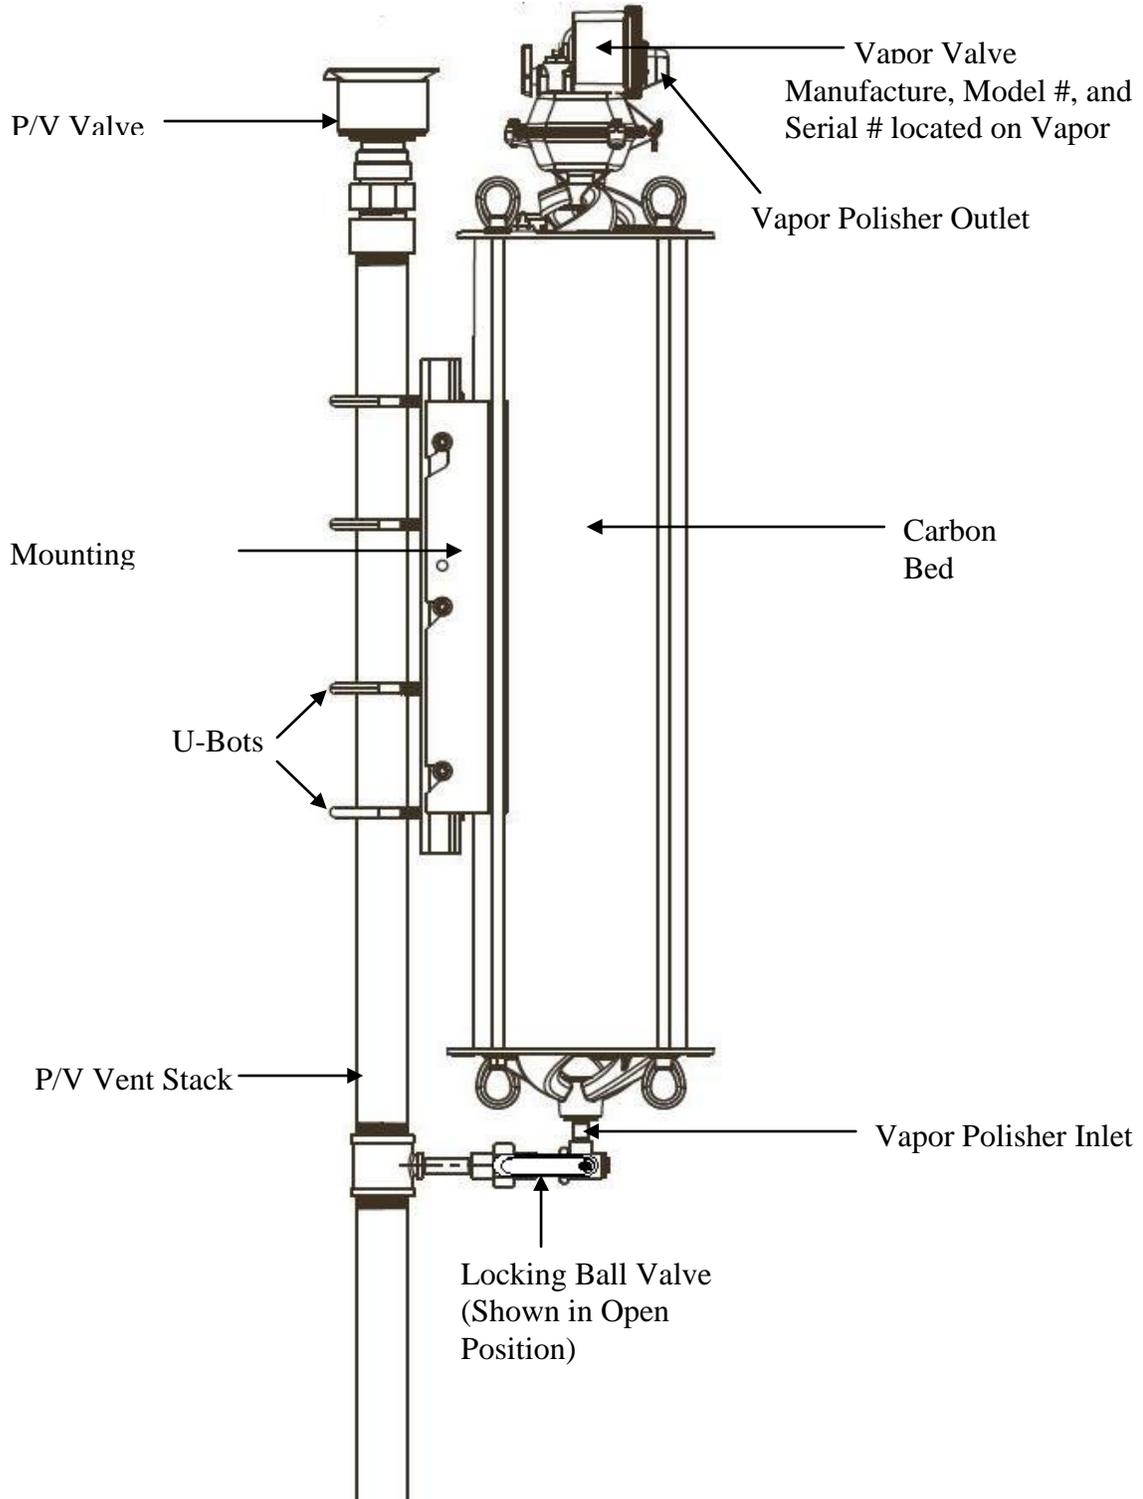


Figure 3

Configuration of Hirt VCS 100 Thermal Oxidizer to Conduct TP-201.3

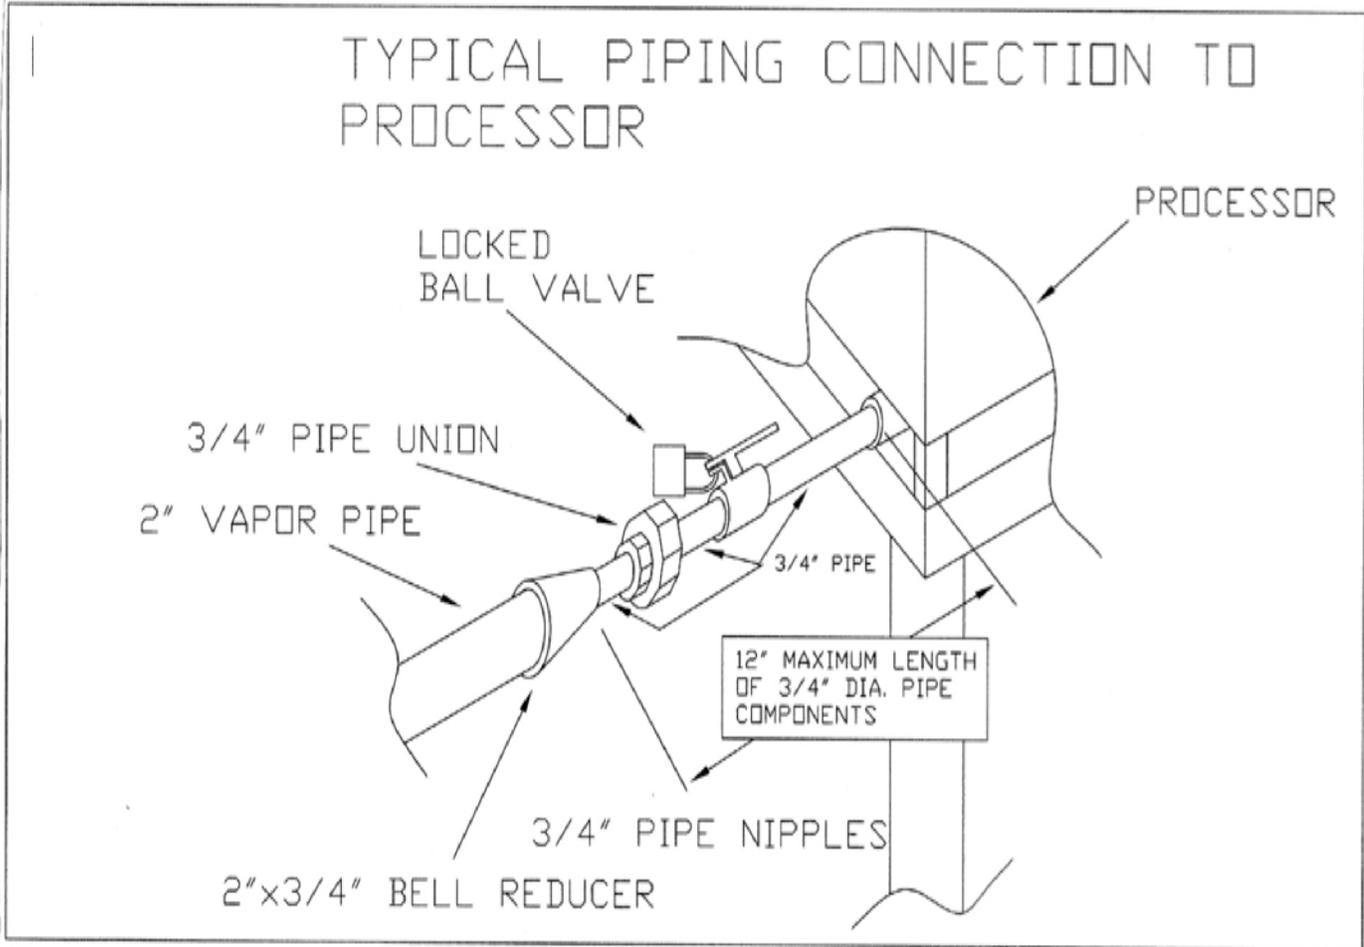


Figure 4

Configuration of Healy Clean Air Separator to Conduct TP-201.3

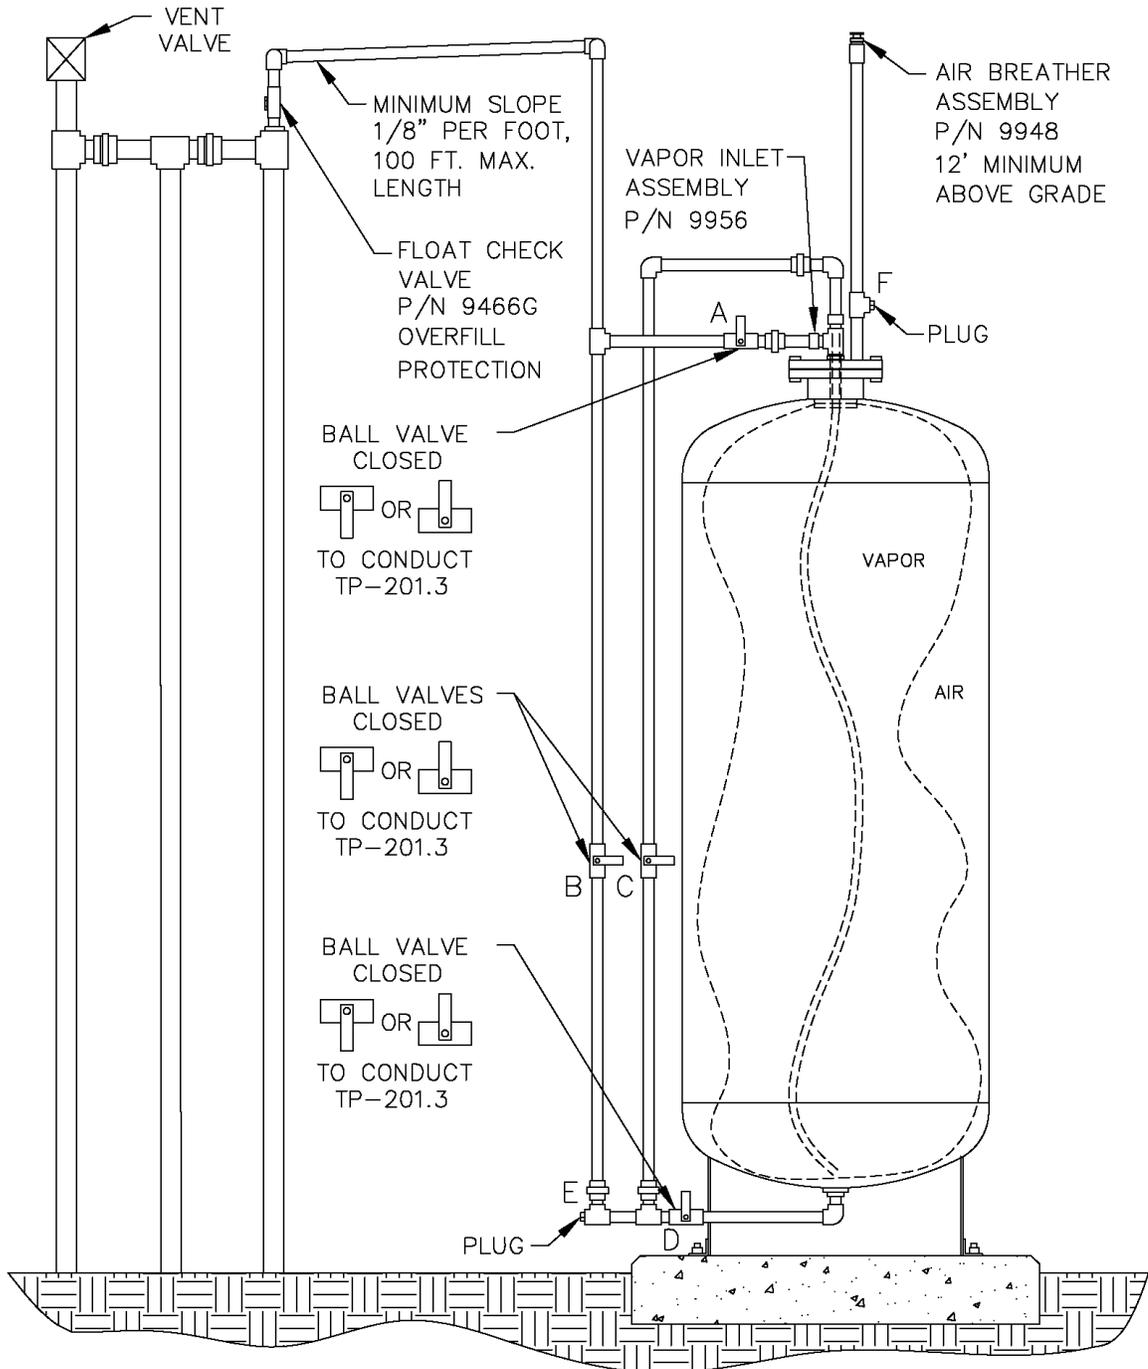


Figure 4H

Configuration of Healy Clean Air Separator to Conduct TP-201.3

