

State of California
AIR RESOURCES BOARD

EXECUTIVE ORDER U-R-1-33

Relating to Certification of New Heavy-Duty Off-Road Equipment Engines

CATERPILLAR, INC.

Pursuant to the authority vested in the Air Resources Board by Sections 43000.5, 43013 and 43018 of the Health and Safety Code; and,

Pursuant to the authority vested in the undersigned by Sections 39515 and 39516 of the Health and Safety Code and Executive Order G-45-9;

IT IS ORDERED AND RESOLVED: That the following Caterpillar, Inc. 1997 model-year engine, with rated power between 175 and 750 horsepower, and exhaust emission control systems are certified as described below for use in heavy-duty off-road equipment:

Typical Equipment Usage: Industrial Equipment

Fuel Type: Diesel

<u>Engine Family</u>	<u>Liters</u>	<u>(Cubic Inches)</u>	<u>Exhaust Emission Control Systems and Special Features</u>
VCP10.RZDARC	10.4	(636)	Turbocharger Smoke Puff Limiter Charge Air Cooler

Engine models and codes are listed on attachments. Production engines shall be in all material respects the same as those for which certification is granted.

The total hydrocarbons (THC), carbon monoxide (CO), nitrogen oxides (NOx), and particulate matters (PM) certification exhaust emission standards, in grams per brake horsepower-hour (g/bhp-hr), and the opacity of smoke emission standards, in percent (%), during acceleration (Accel), lugging (Lug), and peak (Peak) modes, for this engine family are (Title 13, California Code of Regulations, Section 2423):

<u>Exhaust Emissions (g/bhp-hp)</u>				<u>Smoke Opacity (%)</u>		
<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
1.0	8.5	6.9	0.4	20	15	50

The THC, CO, NOx and PM exhaust emission certification values, in g/bhp-hr, and the opacity of smoke emission certification values, in percent (%), for this engine family are:

<u>Exhaust Emissions (g/bhp-hr)</u>					<u>Smoke Opacity (%)</u>		
<u>Engine Family</u>	<u>THC</u>	<u>CO</u>	<u>NOx</u>	<u>PM</u>	<u>Accel</u>	<u>Lug</u>	<u>Peak</u>
VCP10.RZDARC	0.4	1.6	6.6	0.3	15	13	19


BE IT FURTHER RESOLVED: That the listed engine models comply with the "Exhaust Emission Standards and Test Procedures--Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2423) for the aforementioned model year.

BE IT FURTHER RESOLVED: That the listed engine models also comply with the "Emission Control Labels--1996 and Later Heavy-Duty Off-Road Diesel Cycle Engines" (Title 13, California Code of Regulations, Section 2424) for the aforementioned model year.

BE IT FURTHER RESOLVED: That for the listed engine models, the manufacturer has submitted the materials to demonstrate certification compliance with the Board's emission control system warranty provisions (Title 13, California Code of Regulations, Section 2425 et seq.).

Engines certified under this Executive Order must conform to all applicable California emission regulations.

Executed at El Monte, California this 11th day of December 1996.

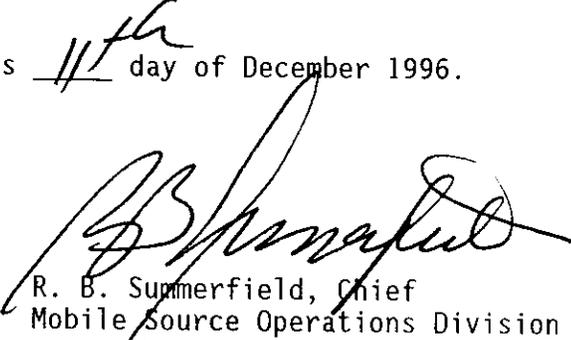

R. B. Summerfield, Chief
Mobile Source Operations Division

**1997 AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
 HEAVY-DUTY OFF-ROAD DIESEL ENGINES**

Manufacturer Caterpillar Inc. Engine Family VCP10.RZDARC
 Displacement 10.4 / 636 Liters/Cubic Inches Engine Configuration: V8
 All Codes in Eng. Family: CA 49S 50S XX Cert Test Procedures: ARB XX EPA XX
 Valves/Ports per Cylinder 2 valves/cyl. Strokes per Combustion Cycle: 4
 Maximum Rated Power: 330 HP (246 KW) @ 2600 RPM
 Ignition: Compression XX Compression with Glow Plug Spark
 Fuel Type (s): Dedicated Flex-Fuel XX Dual-Fuel XX Diesel XX M100 XX M85 XX
 CNG XX LNG XX LPG XX Other (specify) XX
 Diesel Cert Fuel: 40 CFR 86.1313-94 XX Other (specify) XX
 Primary Service Equipment: Industrial
 Exhaust ECS (e.g., MFI, TC, CAC): EM, TC, SPL, DI, CAC

(Use abbreviations per SAE J1930 JUN93)

Engine Model (Eng. Code)	Rated HP @ RPM	Fuel Rate @ Rated HP mm ³ /stroke (lbs/hr)	Fuel Pump & Injector Part No.	ECM/PCM Part No.	EGR Valve Part No.	PTOX / Catalytic Converter Part No.
3208 (1)	MAX 330 @ 2600	104 (121.4)	1367058/1333896	---	---	---
3208 (2)	310 @ 2600	97 (113.6)	1367058/1333896	---	---	---
3208 (3)	315 @ 2400	103 (111.1)	1367058/1333896	---	---	---
3208 (4)	300 @ 2400	98 (105.6)	1367058/1333896	---	---	---
3208 (5)	280 @ 2200	97 (95.4)	1367058/1333896	---	---	---
3208 (6)	MIN 250 @ 2200	86 (85.0)	1367058/1333896	---	---	---

ISSUE DATE	03 SEPT 96						
REVISION NO.							
REVISION DATE							